

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: GLOBO

Supplier's address: switchboard, Gewerbestrasse, AT

Model identifier: 41587-18

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	connection by soldering		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	18	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 837 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2700...6500
On-mode power (P_{on}), expressed in W	17,2	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,14
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	81
Outer dimensions without separate control gear, lighting control	Height	90	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	405	
	Depth	405	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,463 0,420
Parameters for LED and OLED light sources:			
R9 colour rendering index value	2	Survival factor	0,90
the lumen maintenance factor	0,95		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,97	Colour consistency in McAdam ellipses	2
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,2

(a)-: not applicable;

(b)-: not applicable;

Lightsource Test Report

Product Infomation


Product Type: 41587-18
 Product Number: 100

Product Spec:

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.4618$ $y=0.4163$ $u(u')=0.2612$ $v=0.3532$ $v'=0.5298$
 CCT: $T_c=2717K$ ($duv=0.00194$) Color Ratio: $R=0.249$ $G=0.729$ $B=0.022$
 Peak Wavelength: 606.9nm Half Bandwidth: 116.9nm
 Dominant Wavelength: 583.5nm Color Purity: 0.636
 Central Wave: 601.1nm Gravity Wave: 603.0nm
 CRI: $R_a=82.2$ TM30: $R_f=84$, $R_g=93$
 GAI: $GAI_BB_8=84.9$, $GAI_BB_15=94.5$, $GAI_EES=41.7$

R1 =81	R2 =91	R3 =96	R4 =80	R5 =81	R6 =91	R7 =81	R8 =57
R9 =7	R10=81	R11=79	R12=72	R13=83	R14=99	R15=72	
Color Quality Scale: $Q_a=82.9$, $Q_f=85.4$, $Q_p=82.5$, $Q_g=87.7$							
Q1 =78	Q2 =93	Q3 =86	Q4 =81	Q5 =82	Q6 =83	Q7 =83	Q8 =88
Q9 =94	Q10=92	Q11=88	Q12=86	Q13=83	Q14=72	Q15=74	

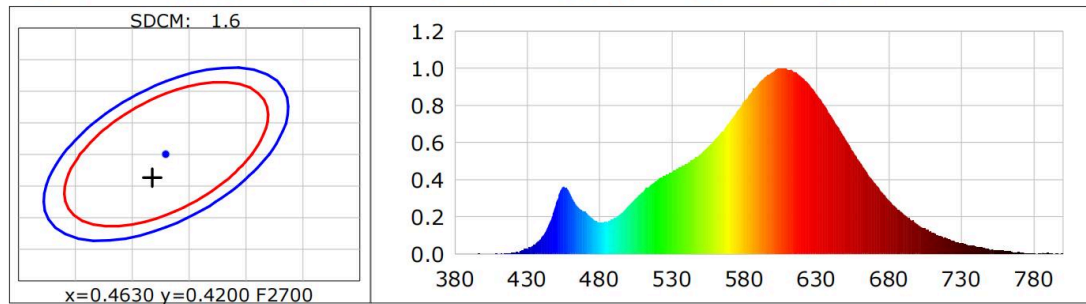

Photometric Parameters

Luminous Flux: 1860.3 lm Efficiency: 106.30 lm/W Radiant Power: 5.655 W
 Total mains efficacy: 106.30 lm/W Energy Efficiency Class: F (EU 2019/2015)

Electric Parameters

Voltage: 230.10V Current: 0.0990A Power: 17.50W
 Power Factor: 0.7650 Frequency: 50.00Hz


Test Information

Scan Range: 380~800:1nm	Photometric Method: sphere-spectroradiometer
Stabilization Time: 0 Sec ALC.: 1.0000	Photometric Condition: Sphere diameter: 1.50m, 4T
Max of Signal: 48658 (4786)	CCD Integration Time: 405.30 ms

Condition: $T_x:32.6^{\circ}C$, $T_i:30.5^{\circ}C$, R.H.:60%
 Test Lab: PHELP
 Operator:

Test Device: CMS-2S (Plus)
 Test Time: 2021-10-04 14:56:31
 Inspector:

Model placed on the Union market from 29/04/2021



EPREL registration number: 1012043

<https://eprel.ec.europa.eu/qr/1012043>

Supplier: Globo Handels GmbH (Importer)

Website:

Customer care service:

Name: switchboard

Website:

Email: office@globo-lighting.com

Phone: 0043 4253 32050

Address:

Gewerbestrasse

Austria