

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: GLOBO Handels GmbH

Supplier's address: switchboard, Gewerbestrasse, AT

Model identifier: 48011-21

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	LED		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	21	Energy efficiency class	E
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	2 840 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000 or 4 000 or 6 000
On-mode power (P_{on}), expressed in W	21,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,50
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	500	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	500	
	Depth	8	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,456 0,403
Parameters for LED and OLED light sources:			
R9 colour rendering index value	13	Survival factor	0,90
the lumen maintenance factor	0,96		

(a) : not applicable;

(b) : not applicable;

Spectral test report for lamp

Product type : 48011-21/2700K
 Product No. :
 Manufacturer :


Test date. : 2021-09-25
 Test equipment : SPEC2000A Spectrometer
 Operator. :

Test Condition

Temperature : 25.0Deg C
 Test range : 380nm-780nm

Humidity : 65%
 Peak AD. : 47345 (72.2%)
 Integral time. : 323ms

Spectral Parameter

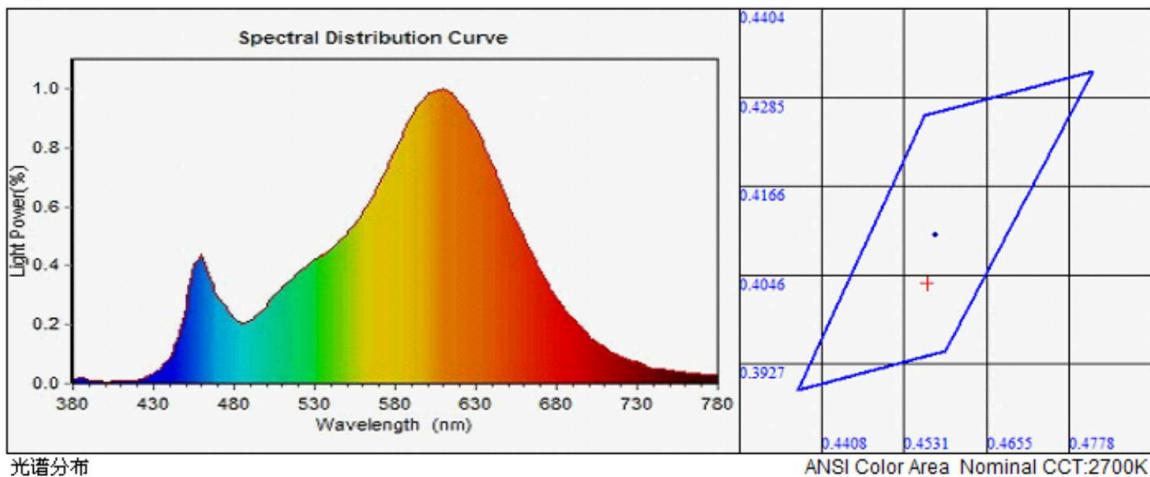

光谱分布

ANSI Color Area Nominal CCT:2700K

CIE Color Parameter

Chromaticity coordinates: $x=0.4566$ $y=0.4036$ $u=0.2635$ $v=0.3494$ ($duv=-0.0023$)
 Color temperature:TC=2692 K Color difference:SDCM=4.3 Main Wavelength: $\lambda_d=-494$ nm Purity:Purity=0.023
 Peak wavelength: $\lambda_p=609.2$ nm FWHM: $\Delta\lambda_p=111.3$ nm Color ratio:R=27.64% G=69.93% B=2.42%

Color rendering index (Ra):Ra=83.8

R1=84.3 R2=95.8 R3=91.3 R4=80.8 R5=85.0 R6=95.2 R7=79.5 R8=58.2
 R9=13.7 R10=90.4 R11=81.1 R12=79.9 R13=88.3 R14=96.1 R15=76.2

Optical Parameter

Luminous flux: 2843.999 lm luminous efficiency:125.84 lm/w Radiant flux: 9.0161 W


Electrical Parameter

Voltage: 219.5 V Current: 0.125 A Watto: 22.60 W Power factor: 0.825

MEASUREFINE

Hangzhou Huiyu Instrument Co., Ltd. <http://www.measurefine.com>

Model placed on the Union market from 11/10/2021



EPREL registration number: 1014447

<https://eprel.ec.europa.eu/qr/1014447>

Supplier: Globo Handels GmbH (Importer)

Website:

Customer care service:

Name: switchboard

Website:

Email: office@globo-lighting.com

Phone: 0043 4253 32050

Address:

Gewerbestrasse

Austria