

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: BAOMING

Supplier's address: SHENZHEN BAOMINGDA SEMI-CONDUCTOR LIGHTING CO., LTD., Via Vilfredo Pareto 125, IT

Model identifier: BL-G9GT43T-4W

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	G9		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:



Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	3	Energy efficiency class	E
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	330 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	3,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,10
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, light-	Height	20	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	6	
	Depth	6	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,464 0,414
Parameters for LED and OLED light sources:			
R9 colour rendering index value	4	Survival factor	0,90
the lumen maintenance factor	0,96		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,50	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,4

(a): not applicable;

(b): not applicable;

Light Source Test Report

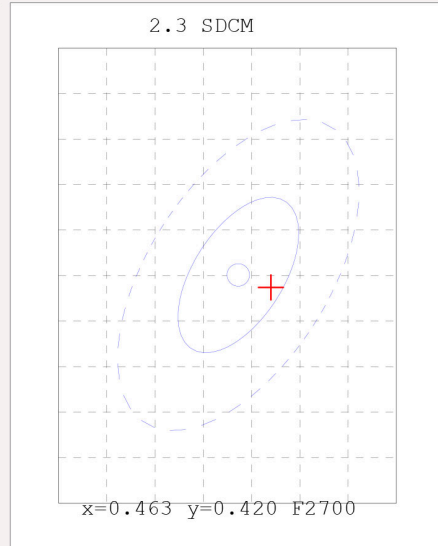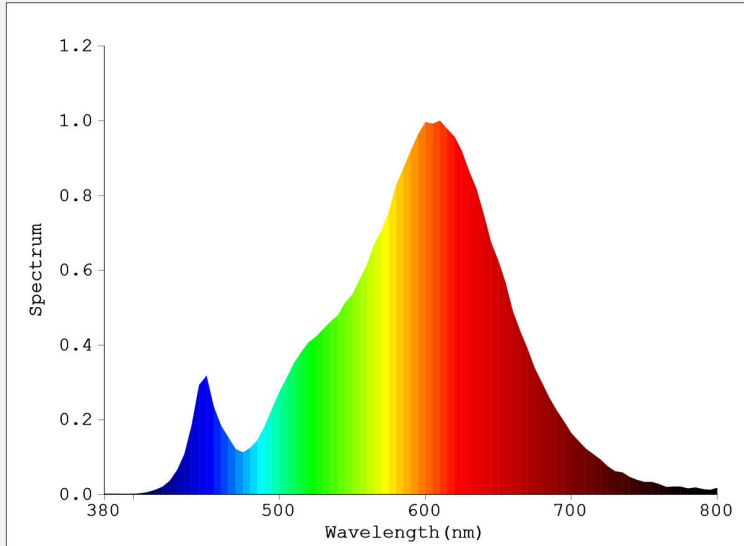

Color Parameters:

Chromaticity Coordinate: $x=0.4659$ $y=0.4189$
 Chromaticity Coordinate: $u'=0.2627$ $v'=0.5314$ ($duv=2.52e-03$)
 Tc=2681K Dominant WL:Ld=583.5nm Purity=65.6% Centroid WL:597.0nm
 Ratio:R=27.0% G=71.3% B=1.7% Peak WL:Lp=610.0nm HWL:116.2nm
 Render Index:Ra=82.3
 R1 =80 R2 =90 R3 =97 R4 =81 R5 =80 R6 =89 R7 =83
 R8 =57 R9 =5 R10=78 R11=81 R12=73 R13=82 R14=99 R15=72

Photo Parameters:

Flux: 280.16 lm Fe: 0.85638 W Efficacy:97.79 lm/W

Electrical Parameters:

Lamp : U=121.5V I=0.02415A P=2.865W PF=0.9760


Instrument Status:

Scan Range:380.0nm-800.0nm Interval:5.0nm[0] $I_p=13358$ (G=5,D=60)
 REF=7211 (R=3) %=-2.281% PMT: 31.1 centigrade [150.0]

Product Type:G9 3W 调光
 Number:2700K
 Temperature:25.3 deg
 Test Operator:
 Software:V3.00.133

Manufacturer:
 Test Department:
 Humidity:65.0%
 Test Date:2021-09-30 10:50:49
 Instrument:PMS-80_V1 (SN:G107113CD1321115)

Model placed on the Union market from 01/09/2021



EPREL registration number: 1021046

<https://eprel.ec.europa.eu/qr/1021046>

Supplier: SHENZHEN BAOMINGDA SEMI- CONDUCTOR LIGHTING CO.,LTD. (Manufacturer)

Website:

Customer care service:

Name: SHENZHEN BAOMINGDA SEMI-CONDUCTOR LIGHTING CO., LTD.

Website:

Email: carl@baolight.com.cn

Phone: 15816464818

Address:

Via Vilfredo Pareto 125
Italy