Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Scandinavian Lighting Concept

Supplier's address: The Light Group, Sagmyra 2a, 4624 Kristiansand, NO

Model identifier: 3234510

Type of light source:


Lighting technology used:	LED	Non-directional or directional:	DLS			
Light source cap-type	COB					
(or other electric interface)						
Mains or non-mains:	MLS	Connected light source (CLS):	Yes			
Colour-tuneable light source:	No	Envelope:	-			
High luminance light source:	Yes					
Anti-glare shield:	No	Dimmable:	Yes			
Product parameters						

Parameter		Value	Parameter	Value		
General product parameters:						
Energy consum mode (kWh/10 up to the neares	00 h), rounded	11	Energy efficiency class	G		
dicating if it refe a sphere (360°)	s flux (φuse), in- ers to the flux in , in a wide cone rrow cone (90º)	650 in Nar- row cone (90°)	Correlated colour temperature, rounded to the near- est 100 K, or the range of correlat- ed colour temper- atures, rounded to the nearest 100 K, that can be set	3 000		
On-mode pow pressed in W	ver (P _{on}), ex-	11,0	Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal	0,00		
(P _{net}) for CLS, e	andby power expressed in W the second dec-	0,00	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	90		
Outer dimen-	Height	55	Spectral power dis-	See image		
sions without	Width	70	tribution in the	in last page		
separate con- trol gear, light- ing control	Depth	70	range 250 nm to 800 nm, at full-load			

parts and non- lighting con- trol parts, if any (millime- tre)							
Claim of equivalent power ^(a)	-	lf yes, equivalent power (W)	-				
		Chromaticity coordi- nates (x and y)	0,452 0,411				
Parameters for directional light sources:							
Peak luminous intensity (cd)	353	Beam angle in de- grees, or the range of beam angles that can be set	36				
Parameters for LED and OLED light sources:							
R9 colour rendering index value	90	Survival factor	0,95				
the lumen maintenance factor	1,00						
Parameters for LED and OLED mains light sources:							
displacement factor (cos φ1)	0,95	Colour consistency in McAdam ellipses	3				
Claims that an LED light source replaces a fluorescent light source without integrated bal- last of a particular wattage.	_(b)	If yes then replace- ment claim (W)	-				
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,4				

(a)'-' : not applicable;

(b)'-' : not applicable;

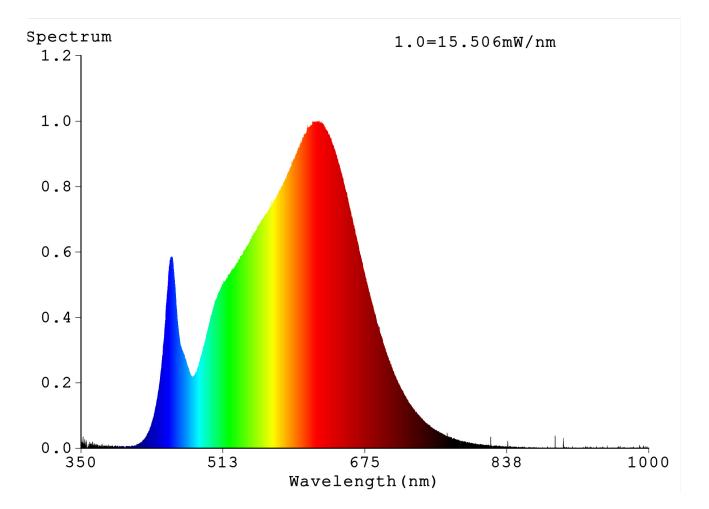

Model placed on the Union market from 01/08/2021



EPREL registration number: 1037534

Supplier: THE LIGHT GROUP AS (Manufacturer)

Customer care service:

Name: The Light Group

Email: post@tlg.no

Address: Sagmyra 2a 4624 Kristiansand Norway

https://eprel.ec.europa.eu/qr/10 37534

Website: www.tlg.no

Website: www.tlg.no

Phone: +4738002101