
## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

sources						
Supplier's name or trade mark: FARO BARCELONA						
Supplier's address: Chief Quality Officer, Dinàmica 1, 08753 Castellbisbal Barcelona, ES						
Model identifier: L00056						
Type of light source:						
Lighting technology used:		LED	Non-directional or directional:	DLS		
Light source cap-type		PCB with screws				
(or other electric interface)						
Mains or non-mains:		NMLS	Connected light source (CLS):	No		
Colour-tuneable light source:		No	Envelope:	-		
High luminance light source:		No				
Anti-glare shield:		Yes	Dimmable:	No		
Product parameters						
Parameter		Value	Parameter	Value		
General product parameters:						
Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer		3	Energy efficiency class	D		
Useful luminous flux (фuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		325 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000		
On-mode power (P <sub>on</sub> ), ex- pressed in W		2,5	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	0,50		
Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	82		
Outer dimen-	Height	3	Spectral power dis-	See image		
sions without	Width	18	tribution in the	in last page		
separate con- trol gear, light- ing control	Depth	18	range 250 nm to 800 nm, at full-load			

parts and non- lighting con- trol parts, if any (millime- tre)						
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-			
		Chromaticity coordi-	0,440			
		nates (x and y)	0,403			
Parameters for directional light sources:						
Peak luminous intensity (cd)	25	Beam angle in degrees, or the range of beam angles that can be set	150			
Parameters for LED and OLED light sources:						
R9 colour rendering index value	12	Survival factor	-			
the lumen maintenance factor	-					

(a)'-': not applicable; (b)'-': not applicable;

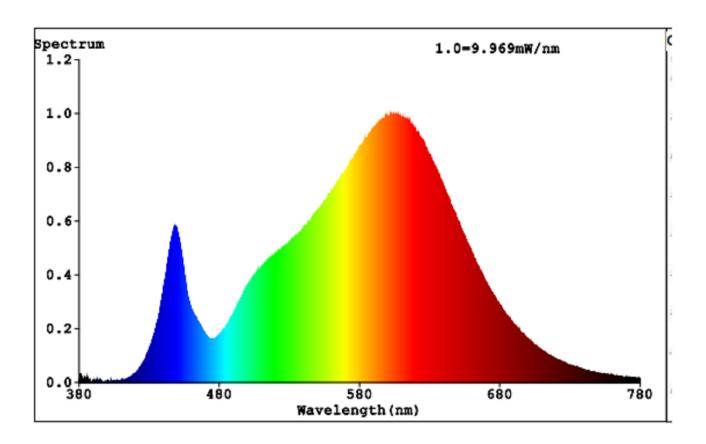

Model placed on the Union market from 14/09/2017



EPREL registration number: 1064348 https://eprel.ec.europa.eu/qr/10

64348

Supplier: LOREFAR SL (Importer) Website: www.faro.es

**Customer care service:** 

Name: Chief Quality Officer Website: www.faro.es

Email: faro@lorefar.com Phone: 902165166

**Address:** Dinàmica 1

08753 Castellbisbal

Spain