Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

| Supplier's name or trade mark: | LIGHT-POINT |
|--------------------------------|-------------|

Supplier's address: LIGHT-POINT, Grønnegade 3, 2. tv., 1107 Copenhagen K, DK

Model identifier: 256337 COMPACT W3

| T | - 6 | 10 - 1- 1 | | |
|----------|------------|-----------|---------|---|
| IVna | α T | IIσnt | source: | , |
| IVDC | vı | HEILL | Jourte. | |


| High luminance light source: Anti-glare shield: | No No | Dimmable: | Yes |
|---|----------|---------------------------------|-----|
| Colour-tuneable light source: | No | Envelope: | - |
| Mains or non-mains: | MLS | Connected light source (CLS): | Yes |
| (or other electric interface) | | | |
| Light source cap-type | LFD | | |
| Lighting technology used: | LED | Non-directional or directional: | DLS |

Product parameters

| Product parameters | | | | |
|---|---|---------------------------------|--|--------------|
| Parameter | | Value | Parameter | Value |
| General product parameters: | | | | |
| Energy consun mode (kWh/10 up to the neares | • • | 12 | Energy efficiency class | F |
| dicating if it refe a sphere (360°), | s flux (φuse), in- ers to the flux in , in a wide cone rrow cone (90º) | 1 080 in Nar- row cone (90°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 3 000 |
| On-mode pow pressed in W | ver (P _{on}), ex- | 12,0 | Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal | 0,00 |
| | andby power expressed in W the second dec- | 0,00 | Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set | 90 |
| Outer dimen- | Height | 250 | Spectral power dis- | See image |
| sions without | Width | 250 | tribution in the | in last page |
| separate con- trol gear, light- ing control | Depth | 45 | range 250 nm to 800 nm, at full-load | |

| parts and non- lighting con- trol parts, if any (millime- tre) | | | | |
|---|-------------|--|----------------|--|
| Claim of equivalent power ^(a) | - | If yes, equivalent power (W) | - | |
| | | Chromaticity coordinates (x and y) | 0,434 0,403 | |
| Parameters for directional light | sources: | | | |
| Peak luminous intensity (cd) | 130 | Beam angle in degrees, or the range of beam angles that can be set | 40 | |
| Parameters for LED and OLED lig | ht sources: | | | |
| R9 colour rendering index value | 55 | Survival factor | 0,90 | |
| the lumen maintenance factor | - | | | |
| Parameters for LED and OLED mains light sources: | | | | |
| displacement factor (cos φ1) | 0,00 | Colour consistency in McAdam ellipses | 3 | |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | _(b) | If yes then replace- ment claim (W) | - | |
| Flicker metric (Pst LM) | 0,1 | Stroboscopic effect metric (SVM) | 0,3 | |

(a)_{'-'} : not applicable;

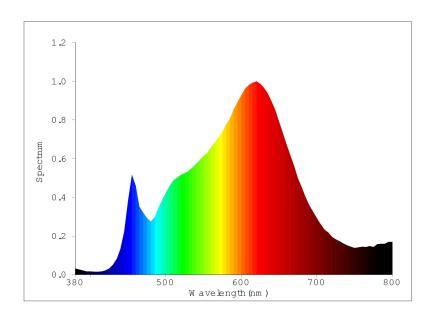

Model placed on the Union market from 01/08/2016



EPREL registration number: 1083938 https://eprel.ec.europa.eu/qr/10

83938

Supplier: LIGHT-POINT A/S (Manufacturer) **Website:**

Customer care service:

Name: LIGHT-POINT Website:

Email: finance@light-point.com Phone: +4570255525

Address:

Grønnegade 3, 2. tv. 1107 Copenhagen K

Denmark