Product Information Sheet

sions without

separate con-

trol gear, light-

control

ing

Width

Depth

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

sources					
Supplier's name or trade mark:	LIGHT-POINT				
Supplier's address: LIGHT-POIN	T, Grønnegade 3, 2.	tv., 1107 Copenhagen K,	DK		
Model identifier: 270051 FOCUS	S MINI 2				
Type of light source:					
Lighting technology used:	LED	Non-directional or directional:	DLS		
Light source cap-type	LED				
(or other electric interface)					
Mains or non-mains:	MLS	Connected light source (CLS):	Yes		
Colour-tuneable light source:	No	Envelope:	-		
High luminance light source:	No				
Anti-glare shield:	No	Dimmable:	Yes		
	Product para	meters			
Parameter	Value	Parameter	Value		
	General product p	arameters:			
Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer	8	Energy efficiency class	F		
Useful luminous flux (фuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	720 in Nar- row cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700		
On-mode power (P _{on}), expressed in W	8,0	Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal	0,00		
Networked standby power (P _{net}) for CLS, expressed in W and rounded to the second decimal	0,00	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	90		
Outer dimen-	25	Spectral power dis-	See image		

160

80

tribution in the


range 250 nm to 800

nm, at full-load

in last page

parts and non- lighting con- trol parts, if any (millime- tre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,434 0,403	
Parameters for directional light sources:				
Peak luminous intensity (cd)	130	Beam angle in degrees, or the range of beam angles that can be set	40	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	55	Survival factor	0,90	
the lumen maintenance factor	-			
Parameters for LED and OLED mains light sources:				
displacement factor (cos φ1)	0,00	Colour consistency in McAdam ellipses	3	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	_(b)	If yes then replace- ment claim (W)	-	
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,3	

(a)_{'-'} : not applicable;

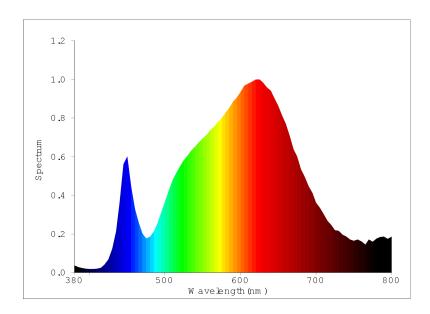

Model placed on the Union market from 20/08/2019



EPREL registration number: 1083961 https://eprel.ec.europa.eu/qr/10

83961

Supplier: LIGHT-POINT A/S (Manufacturer) **Website:**

Customer care service:

Name: LIGHT-POINT Website:

Email: finance@light-point.com Phone: +4570255525

Address:

Grønnegade 3, 2. tv. 1107 Copenhagen K

Denmark