

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: GLOBO Handels GmbH

Supplier's address: switchboard, Gewerbestrasse 3, AT

Model identifier: 41366B

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes


Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	18	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 800 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000 or 4 000 or 6 500
On-mode power (P_{on}), expressed in W	18,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,50
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	280	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	280	
	Depth	55	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,375 0,371
Parameters for LED and OLED light sources:			
R9 colour rendering index value	20	Survival factor	1,00
the lumen maintenance factor	0,96		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,77	Colour consistency in McAdam ellipses	2
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,1

(a)-: not applicable;

(b)-: not applicable;



Lighting Measure Report

Color Parameter

Chroma Coordinate: $x=0.3756$ $y=0.3716$ $u=0.224$ $v=0.3324$

Chroma Coordinate: $u'=0.224$ $v'=0.4986$

CCT.: CCT=4097K Dominant: $d=578.8\text{nm}$ Barycenter: $b=568\text{nm}$ Peak Wavelength: $p=455.4\text{nm}$

FWHM: 22.84nm Purity: $Pe=24.25\%$ Red Ratio: $R=0.186$ Green Ratio: $G=0.772$ Blue Ratio: $B=0.042$

Color CRI.: $Ra=86.02$

R 1=86

R 2=95

R 3=96

R 4=83

R 5=85

R 6=90

R 7=85

R 8=68

R 9=20

R10=85

R11=82

R12=63

R13=89

R14=99

R15=80

Luminosity Parameter

Luminous Flux(380-780nm): 1841.89lm Optical Power(380-780nm): 5.661W Efficient(380-780nm): 107.5lm/W



Electric Parameter

Voltage: $U=221\text{V}$ Current: $I=99\text{mA}$ Power: $P=17.13\text{W}$ PF: $PF=0.782$

Device State

Wavelength Range: 380nm-780nm Wavelength Interval: 1nm

SDCM: : 3.2 SDCM

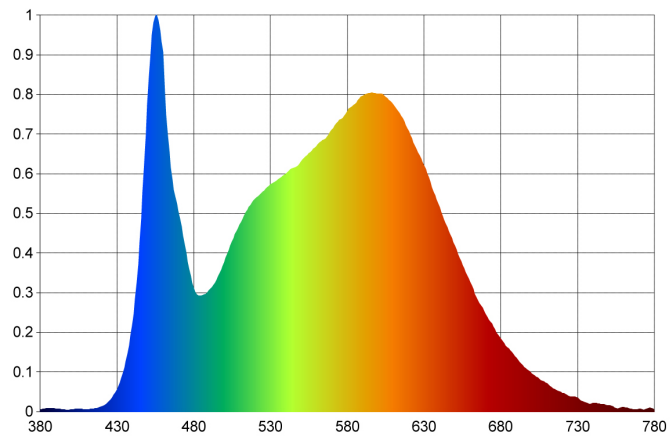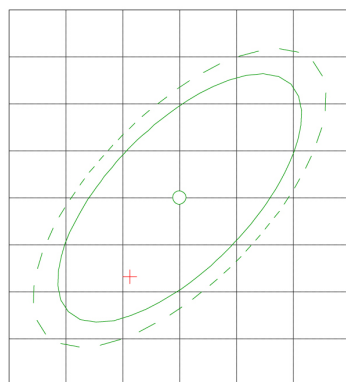

Product Model: LED

Sample No.: 12

Test Cond: $T_g=24.2\text{Cels}$ $T_a=24.6\text{Cels}$ $RH=60\%$

Test Date: 2021-11-19


Manufacturer: Volnic

Product Category: 41366B 4000K

Measure Device: Volnic X10 Series CCD Spectrum System

Operator(Sign): _____

Model placed on the Union market from 01/07/2021



EPREL registration number: 1098619

<https://eprel.ec.europa.eu/qr/1098619>

Supplier: Globo Handels GmbH (Importer)

Website:

Customer care service:

Name: switchboard

Website:

Email: office@globo-lighting.com

Phone: 0043 4253 32050

Address:

Gewerbestrasse 3

Austria