

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** GLOBO Handels GmbH

**Supplier's address:** switchboard, Gewerbestrasse 3, AT

**Model identifier:** 41366W

## Type of light source:

|   |     |                                 |      |
|---|-----|---------------------------------|------|
| Lighting technology used:                           | LED | Non-directional or directional: | NDLS |
| Light source cap-type (or other electric interface) | LED |                                 |      |
| Mains or non-mains:                                 | MLS | Connected light source (CLS):   | No   |
| Colour-tuneable light source:                       | No  | Envelope:                       | -    |
| High luminance light source:                        | No  |                                 |      |
| Anti-glare shield:                                  | No  | Dimmable:                       | Yes  |


## Product parameters

| Parameter  | Value                  | Parameter  | Value   |
|--|------------------------|--|---|
| <b>General product parameters:</b>   |                        |  |   |
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer  | 18                     | Energy efficiency class  | F   |
| Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 1 900 in Sphere (360°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 3 000 or 4 000 or 6 500   |
| On-mode power ( $P_{on}$ ), expressed in W   | 18,0                   | Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal   | 0,50  |
| Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal  | -                      | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set   | 80  |
| Outer dimensions without separate control gear, lighting control   | Height                 | 280  | Spectral power distribution in the range 250 nm to 800 nm, at full-load |
|  | Width                  | 280  |   |
|  | Depth                  | 55   |   |
|  |                        |  | See image in last page  |

|   |      |                                       |                |
|---|------|---------------------------------------|----------------|
| parts and non-lighting control parts, if any (millimetre)   |      |                                       |                |
| Claim of equivalent power <sup>(a)</sup>  | -    | If yes, equivalent power (W)          | -              |
|   |      | Chromaticity coordinates (x and y)    | 0,373<br>0,369 |
| <b>Parameters for LED and OLED light sources:</b>   |      |                                       |                |
| R9 colour rendering index value   | 23   | Survival factor                       | 1,00           |
| the lumen maintenance factor  | 0,96 |                                       |                |
| <b>Parameters for LED and OLED mains light sources:</b>   |      |                                       |                |
| displacement factor (cos $\phi_1$ )   | 0,77 | Colour consistency in McAdam ellipses | 2              |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | -(b) | If yes then replacement claim (W)     | -              |
| Flicker metric (Pst LM)   | 0,1  | Stroboscopic effect metric (SVM)      | 0,1            |

(a)-: not applicable;

(b)-: not applicable;



# Lighting Measure Report

## Color Parameter

Chroma Coordinate:x=0.3738 y=0.3696 u=0.2236 v=0.3316

Chroma Coordinate:u'=0.2236 v'=0.4974

CCT.:CCT=4135K Dominant: d=578.8nm Barycenter: b=568nm Peak Wavelength: p=455.9nm

FWHM: 23.71nm Purity:Pe=23.11% Red Ratio:R=0.186 Green Ratio:G=0.77 Blue Ratio:B=0.044

Color CRI.:Ra=86.51

|        |        |        |        |        |        |        |
|--------|--------|--------|--------|--------|--------|--------|
| R 1=87 | R 2=95 | R 3=96 | R 4=83 | R 5=86 | R 6=91 | R 7=85 |
| R 8=69 | R 9=23 | R10=86 | R11=83 | R12=63 | R13=90 | R14=99 |
| R15=81 |        |        |        |        |        |        |

## Luminosity Parameter

Luminous Flux(380-780nm):1978.2lm Optical Power(380-780nm):6.14W Efficient(380-780nm):116.7lm/W



## Electric Parameter

Voltage: U=220.5V Current: I=98mA Power: P=16.95W PF: PF=0.782

## Device State

Wavelength Range: 380nm-780nm Wavelength Interval: 1nm


SDCM : 3.9 SDCM

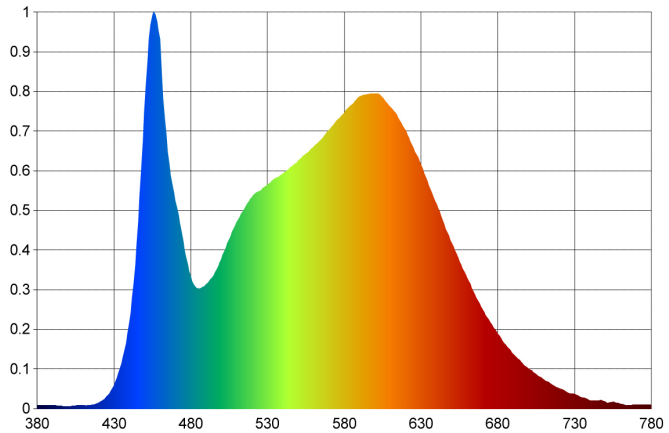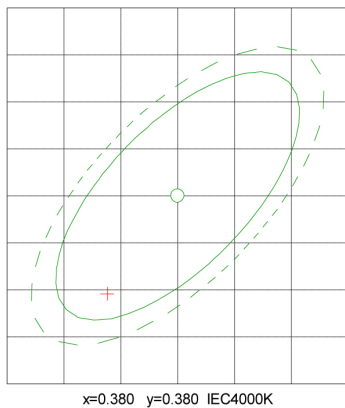

Product Model: LED  
 Sample No.: 5  
 Test Cond:Tg=24.2Cels Ta=24.6Cels RH=60%  
 Test Date: 2021-11-19

Manufacturer: Volnic  
 Product Category: 41366W 4000K  
 Measure Device: Volnic X10 Series CCD Spectrum System  
 Operator(Sign): \_\_\_\_\_

Model placed on the Union market from 01/07/2021



**EPREL registration number:** 1098778

<https://eprel.ec.europa.eu/qr/1098778>

**Supplier:** Globo Handels GmbH (Importer)

**Website:**

**Customer care service:**

**Name:** switchboard

**Website:**

**Email:** [office@globo-lighting.com](mailto:office@globo-lighting.com)

**Phone:** 0043 4253 32050

**Address:**

Gewerbestrasse 3

Austria