

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Northern

Supplier's address: Northern, Bygdøy allé 68, 0265 oslo oslo oslo, NO

Model identifier: ME dim floor

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	AC LED MODULE		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	Yes	Dimmable:	Yes

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	13	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 228 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 899
On-mode power (P_{on}), expressed in W	1,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,10
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without separate control gear, lighting control	Height	8	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	85	
	Depth	85	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,445 0,409
Parameters for directional light sources:			
Peak luminous intensity (cd)	600	Beam angle in degrees, or the range of beam angles that can be set	120
Parameters for LED and OLED light sources:			
R9 colour rendering index value	50	Survival factor	0,00
the lumen maintenance factor	0,00		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,00	Colour consistency in McAdam ellipses	0
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0

(a) '-': not applicable;

(b) '-': not applicable;

Light Source Test Report

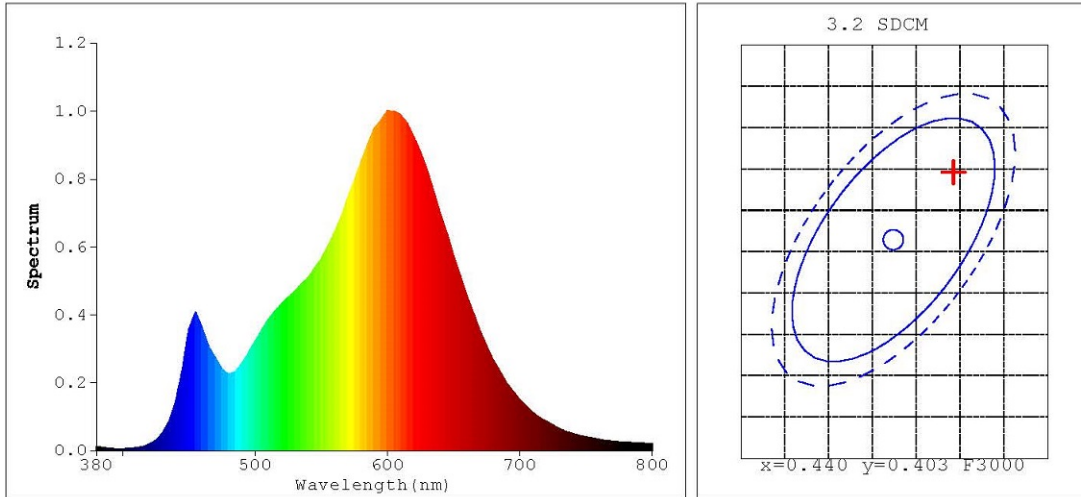

Color Parameters:

Chromaticity Coordinate: $x=0.4459$ $y=0.4096$
Chromaticity Coordinate: $u'=0.2539$ $v'=0.5249$ ($duv=1.02e-03$)
Tc=2899K Dominant WL:Ld=582.9nm Purity=56.8% Centroid WL:592.0nm
Ratio:R=25.4% G=72.1% B=2.4% Peak WL:Lp=600.0nm HWL:118.3nm
Render Index:Ra=82.5
R1 =81 R2 =93 R3 =94 R4 =80 R5 =82 R6 =92 R7 =81
R8 =57 R9 =5 R10=84 R11=80 R12=75 R13=84 R14=97 R15=73

Photo Parameters:

Flux: 1228.7 lm Fe: 3.7555 W Efficacy:92.69 lm/W

Electrical Parameters:


Lamp : U=231.5V I=0.06477A P=13.26W PF=0.8839

Instrument Status:

Scan Range:380.0nm-800.0nm Interval:5.0nm[0]
REF=50922 (R=4) %=-0.312%

Ip=25627 (G=4,D=56)
PMT: 26.8 centigrade [25.4]

Model placed on the Union market from 01/02/2022



EPREL registration number: 1104653

<https://eprel.ec.europa.eu/qr/1104653>

Supplier: Northern.no AS (Manufacturer)

Website: www.northern.no

Customer care service:

Name: Northern

Website: northern.no

Email: post@northern.no

Phone: +47 40 00 70 37

Address:

Bygdøy allé 68

0265 oslo

Norway