

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: LOOM Design

Supplier's address: Main Office, Lilleringvej 30, 8462 Aarhus Harlev, DK

Model identifier: MJ-1002B

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	LED		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	13	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	882 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 733
On-mode power (P_{on}), expressed in W	13,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90
Outer dimensions without separate control gear, light-	Height	1	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	3	
	Depth	3	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,463 0,420
Parameters for directional light sources:			
Peak luminous intensity (cd)	13	Beam angle in degrees, or the range of beam angles that can be set	36
Parameters for LED and OLED light sources:			
R9 colour rendering index value	91	Survival factor	0,90
the lumen maintenance factor	0,95		

(a) : not applicable;

(b) : not applicable;

Lightsource Test Report


Product Information

Product Type: mj-1002w

Product Number: 2

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.4597$ $y=0.4145$ $u(u')=0.2606$ $v=0.3525$ $v'=0.5288$
 CCT: $T_c=2733K$ ($duv=0.00147$) Color Ratio: $R=0.268$ $G=0.707$ $B=0.025$
 Peak Wavelength: 636.3nm Half Bandwidth: 156.2nm
 Dominant Wavelength: 583.6nm Color Purity: 0.624
 Central Wave: 616.7nm Gravity Wave: 623.1nm
 CRI: $R_a=98.3$ TM30: $R_f=96$, $R_g=100$
 GAI: $GAI_BB_8=95.3$, $GAI_BB_15=100.1$, $GAI_EES=47.3$
 R1 =100 R2 =99 R3 =96 R4 =99 R5 =100 R6 =99 R7 =99 R8 =97
 R9 =91 R10=96 R11=96 R12=89 R13=100 R14=97 R15=98
 Color Quality Scale: $Q_a=95.2$, $Q_f=97.3$, $Q_p=97.5$, $Q_g=96.9$
 Q1 =94 Q2 =96 Q3 =94 Q4 =95 Q5 =97 Q6 =96 Q7 =97 Q8 =97
 Q9 =95 Q10=94 Q11=94 Q12=95 Q13=96 Q14=96 Q15=95

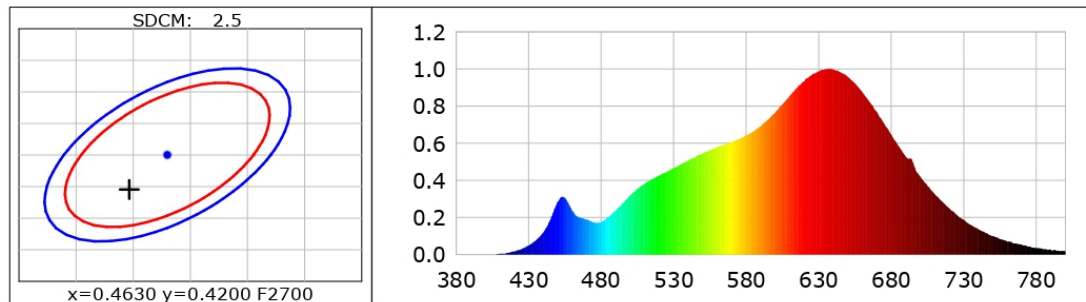

Photometric Parameters

Luminous Flux: 882.35 lm Efficiency: 68.83 lm/W Radiant Power: 3.363 W
 Total mains efficacy: 80.94 lm/W Energy Efficiency Class: G (EU 2019/2015)

Electric Parameters

Voltage: 219.20V Current: 0.0610A Power: 12.82W
 Power Factor: 0.9570 Frequency: 49.99Hz


Test Information

Scan Range: 380~800:1nm Photometric Method: sphere-spectroradiometer
 Stabilization Time: 0 Sec ALC.: 1.0000 Photometric Condition: Sphere diameter: 1.50m, 4T
 Max of Signal: 45885 (2411) CCD Integration Time: 367.39 ms

Condition: Tx:19.7°C, Ti:19.4°C, R.H.:60%
 Test Lab:
 Operator:

Test Device: CMS-2S (Plus)
 Test Time: 2021-12-23 10:24:18
 Inspector:

Model placed on the Union market from 02/05/2021



EPREL registration number: 1104861

<https://eprel.ec.europa.eu/qr/1104861>

Supplier: Lampefeber A/S (Importer)

Website: www.lampefeber.com

Customer care service:

Name: Main Office

Website:

Email: mail@lampefeber.com

Phone: 4586361722

Address:

Lilleringvej 30
8462 Harlev
Denmark