

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** LOOM Design

**Supplier's address:** Main Office, Lilleringvej 30, 8462 Aarhus Harlev, DK

**Model identifier:** 804-002

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	COB		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters


Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	28	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	2 643 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 648
On-mode power ( $P_{on}$ ), expressed in W	28,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	93
Outer dimensions without separate control gear, lighting control	Height	9	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	9	
	Depth	9	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,465 0,413
<b>Parameters for directional light sources:</b>			
Peak luminous intensity (cd)	7 072	Beam angle in degrees, or the range of beam angles that can be set	36
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	58	Survival factor	1,00
the lumen maintenance factor	0,80		

(a) : not applicable;

(b) : not applicable;

**Spectrum Test Report**

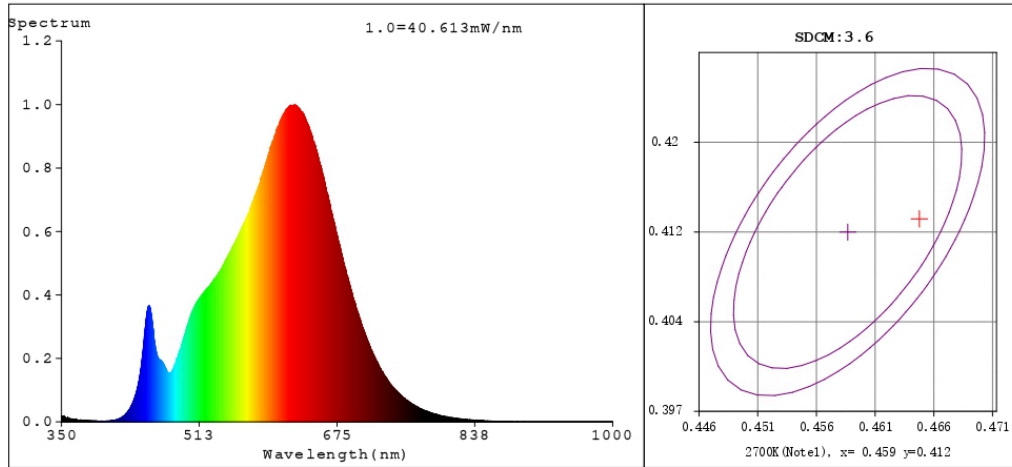

**Color Parameters:**

Chromaticity Coordinate:  $x=0.4651$   $y=0.4131$  /  $u'=0.2647$   $v'=0.5291$   
 CCT=2648K (Duv=0.0005) Dominant WL:Ld =584.3nm WL:Lc = --nm Purity=63.6%  
 Ratio:R=26.9% G=70.7% B=2.4% Peak WL:Lp=625.1nm FWHM=140.7nm  
 Render Index:Ra=93.2 AvgR=90.7 TM30:Rf=92 Rg=99

R1 =93 R2 =97 R3 =99 R4 =94 R5 =94 R6 =97 R7 =91  
 R8 =81 R9 =58 R10=93 R11=96 R12=86 R13=94 R14=99 R15=88

**Photo Parameters:**

Flux = 1819 lm Eff. : 64.18 lm/W Fe = 6.518 W  
 Scotopic:2296.7 S/P:1.2626

**Electrical parameters:**


V = 229.88 V I = 0.1311 A P = 28.34 W PF = 0.9404  
 LEVEL:OUT WHITE:ANSI\_2700K  
 Status: Integral T = 250 ms Ip = 43462 (66%)

**GBT5702**

Model:TL58-28G27-36  
 Tester:DAMIN  
 Temperature:25.3Deg  
 Manufacturer:EVERFINE

Number:N-00001  
 Date:2022-01-05 17:15:33  
 Humidity:65.0%  
 Remarks:---

Model placed on the Union market from 08/02/2021



**EPREL registration number:** 1110823

<https://eprel.ec.europa.eu/qr/1110823>

**Supplier:** Lampefeber A/S (Importer)

**Website:** [www.lampefeber.com](http://www.lampefeber.com)

**Customer care service:**

**Name:** Main Office

**Website:**

**Email:** [mail@lampefeber.com](mailto:mail@lampefeber.com)

**Phone:** 86361722

**Address:**

Lilleringvej 30  
8462 Harlev  
Denmark