

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: LOOM Design

Supplier's address: Main Office, Lilleringvej 30, 8462 Aarhus Harlev, DK

Model identifier: 810-001

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	R6490		
Mains or non-mains:	NMLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	10	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	915 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	10,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without separate control gear, lighting control	Height	15	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	133	
	Depth	133	
			See image in last page


parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,451 0,400
Parameters for LED and OLED light sources:			
R9 colour rendering index value	13	Survival factor	0,97
the lumen maintenance factor	0,98		

(a) : not applicable;

(b) : not applicable;

R6490

Light Source Test Report

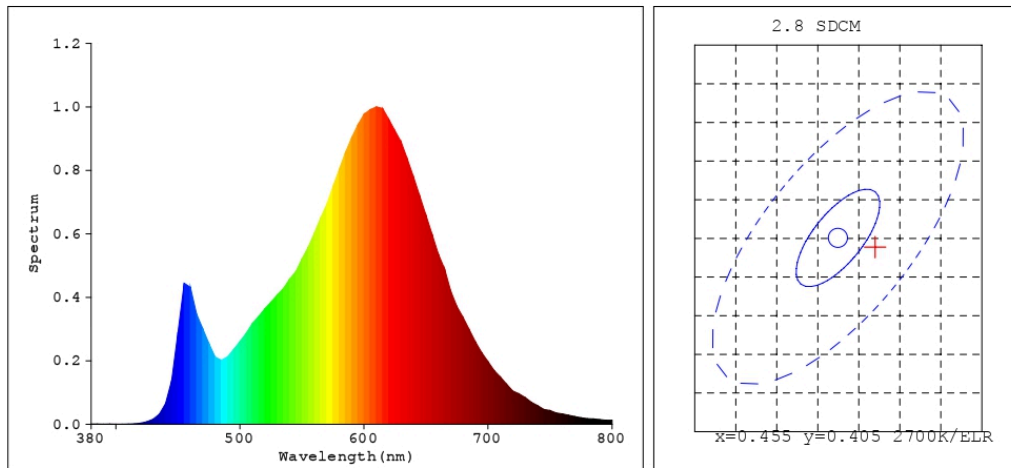

Color Parameters:

Chromaticity Coordinate: $x=0.4589$ $y=0.4040$
 Chromaticity Coordinate: $u'=0.2648$ $v'=0.5247$ ($duv=-2.36e-03$)
 Tc=2722K Dominant WL:Ld=582.9nm Purity=51.1% Centroid WL:589.0nm
 Ratio:R=24.7% G=73.1% B=2.2% Peak WL:Lp=610.0nm HWL:134.0nm
 Render Index:Ra=83.8
 R1 =82 R2 =91 R3 =97 R4 =83 R5 =83 R6 =89 R7 =84
 R8 =62 R9 =12 R10=79 R11=83 R12=73 R13=84 R14=99 R15=75

Photo Parameters:

Flux: 916.78 lm Fe: 2.8151 W Efficacy:96.08 lm/W

Electrical Parameters:

Luminaire: U=27.27V I=0.3499A P=9.541W PF=1.000


Instrument Status:

Scan Range:380.0nm-800.0nm Interval:5.0nm[0] Ip=58016(G=5,D=60)
 REF=33429(R=3) %=-0.045% PMT: 29.1 centigrade [26.8]

Product Type:R6490
 Number:1
 Temperature:25.3 deg
 Test Operator:LENGYUNFEI
 Software:V2.00.122

Manufacturer:UCOME
 Test Department:UCOME
 Humidity:65.0%
 Test Date:2021-10-14 14:40:26
 Instrument:PMS-80_V1 (SN:YG107113N11110070)

Model placed on the Union market from 08/02/2021



EPREL registration number: 1118188

<https://eprel.ec.europa.eu/qr/1118188>

Supplier: Lampefeber A/S (Importer)

Website: www.lampefeber.com

Customer care service:

Name: Main Office

Website:

Email: mail@lampefeber.com

Phone: 86361722

Address:

Lilleringvej 30
8462 Harlev
Denmark