

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** LOOM Design

**Supplier's address:** Main Office, Lilleringvej 30, 8462 Aarhus Harlev, DK

**Model identifier:** 808-001

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	LED		
Mains or non-mains:	NMLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	10	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	910 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power ( $P_{on}$ ), expressed in W	9,2	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	84
Outer dimensions without separate control gear, lighting control	Height	1	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	13	
	Depth	13	
			See image in last page


parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,454 0,407
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	13	Survival factor	0,96
the lumen maintenance factor	0,96		

(a) : not applicable;

(b) : not applicable;

**R2900**

**Light Source Test Report**

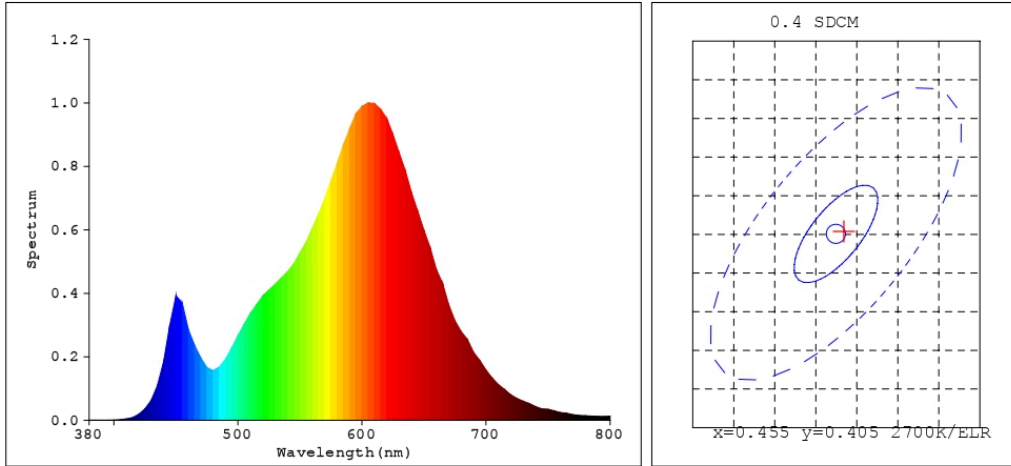

**Color Parameters:**

Chromaticity Coordinate:  $x=0.4558$   $y=0.4053$   
 Chromaticity Coordinate:  $u'=0.2623$   $v'=0.5247$  ( $duv=-1.65e-03$ )  
 Tc=2705K Dominant WL:Ld=582.9nm Purity=51.8% Centroid WL:590.0nm  
 Ratio:R=24.8% G=73.1% B=2.0% Peak WL:Lp=610.0nm HWL:135.2nm  
 Render Index:Ra=83.8  
 R1 =82 R2 =90 R3 =96 R4 =84 R5 =83 R6 =88 R7 =85  
 R8 =63 R9 =13 R10=77 R11=84 R12=75 R13=84 R14=98 R15=75

**Photo Parameters:**

Flux: 912.22 lm Fe: 2.8172 W Efficacy:98.52 lm/W

**Electrical Parameters:**

Luminaire: U=18.52V I=0.4999A P=9.259W PF=1.000

*Instrument Status:*

Scan Range:380.0nm-800.0nm Interval:5.0nm[0] Ip=56904(G=5,D=54)  
 REF=33269(R=3) %=-0.045% PMT: 19.6 centigrade [20.7]

Product Type:R2900	Manufacturer:UCOME
Number:1	Test Department:UCOME
Temperature:25.3 deg	Humidity:65.0%
Test Operator:LENGYUNFEI	Test Date:2021-05-10 12:29:33
Software:V2.00.122	Instrument:PMS-80_V1 (SN:YG107113N11110070)

Model placed on the Union market from 08/02/2021



**EPREL registration number:** 1118263

<https://eprel.ec.europa.eu/qr/1118263>

**Supplier:** Lampefeber A/S (Importer)

**Website:** [www.lampefeber.com](http://www.lampefeber.com)

**Customer care service:**

**Name:** Main Office

**Website:** [www.loom-design.com](http://www.loom-design.com)

**Email:** [mail@lampefeber.com](mailto:mail@lampefeber.com)

**Phone:** +4586361722

**Address:**

Lilleringvej 30  
8462 Harlev  
Denmark