

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Sigor

Supplier's address: SIGOR Licht GmbH, Eichenhofer Weg 81, 42279 Wuppertal, DE

Model identifier: 4043201

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Wired		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	Yes	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:


Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	36	Energy efficiency class	D
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	4 320 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W	36,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, light-	Height	28	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	300	
	Depth	1 200	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,448 0,409
Parameters for directional light sources:			
Peak luminous intensity (cd)	1 750	Beam angle in degrees, or the range of beam angles that can be set	88
Parameters for LED and OLED light sources:			
R9 colour rendering index value	1	Survival factor	0,90
the lumen maintenance factor	0,70		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,95	Colour consistency in McAdam ellipses	5
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	.. ^(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,1


(a)'.-' : not applicable;

(b)'.-' : not applicable;

PowerSpectrum @ 1 meter Source Sensor Distance

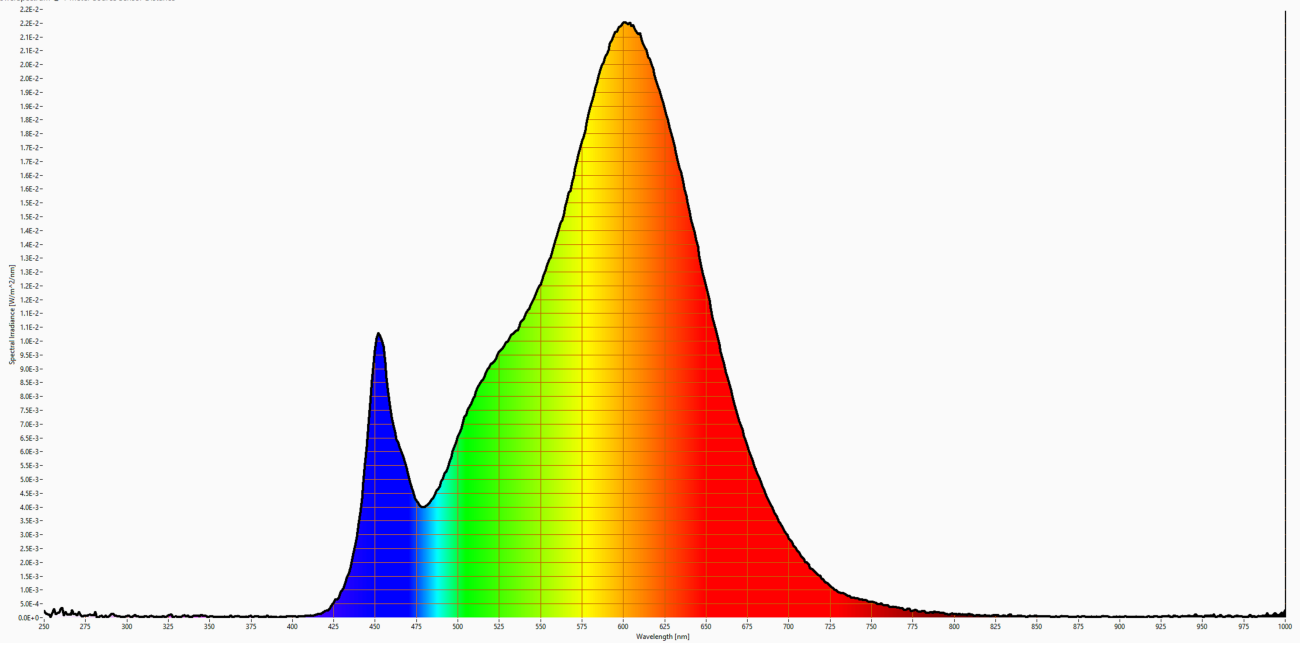

Model placed on the Union market from 31/05/2022



EPREL registration number: 1254616

<https://eprel.ec.europa.eu/qr/1254616>

Supplier: SIGOR Licht GmbH (Manufacturer)

Website:

Customer care service:

Name: SIGOR Licht GmbH

Website: <https://shop.sigor.de/>

Email: qm@sigor.de

Phone: 02339 12610

Address:

Eichenhofer Weg 81
42279 Wuppertal
Germany