

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Northern

Supplier's address: Northern, Bygdøy alle 68, 0265 OSLO, NO

Model identifier: Balancer mini wall/table

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Push		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	Yes	Dimmable:	Yes

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	6	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	527 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	5,8	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	85
Outer dimensions without separate control gear, lighting control	Height	8	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	47	
	Depth	51	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,439 0,413
Parameters for directional light sources:			
Peak luminous intensity (cd)	527	Beam angle in degrees, or the range of beam angles that can be set	180
Parameters for LED and OLED light sources:			
R9 colour rendering index value	85	Survival factor	0,88
the lumen maintenance factor	0,92		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,80	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	-

(a) '-': not applicable;

(b) '-': not applicable;

Light Source Test Report

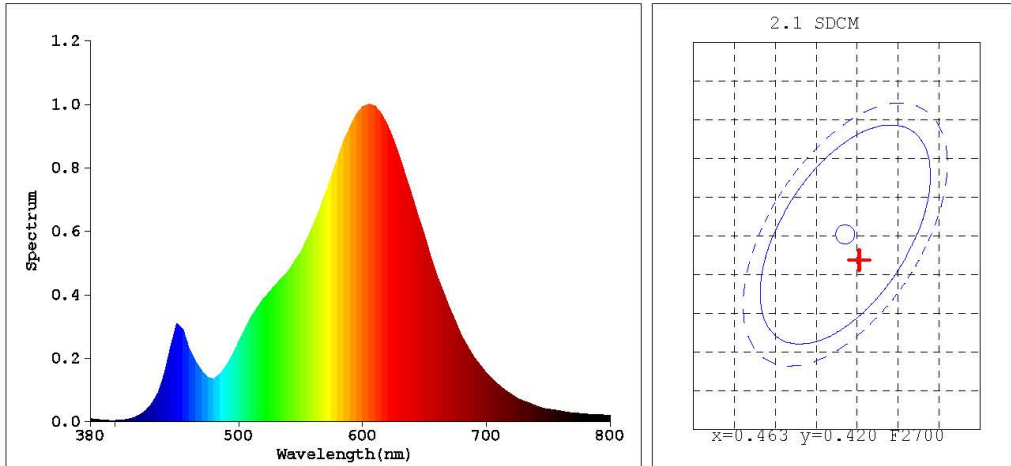

Color Parameters:

Chromaticity Coordinate: $x=0.4645$ $y=0.4173$
Chromaticity Coordinate: $u'=0.2624$ $v'=0.5306$ ($duv=2.08e-03$)
Tc=2689K Dominant WL:Ld=583.6nm Purity=64.7% Centroid WL:596.0nm
Ratio:R=26.7% G=71.5% B=1.8% Peak WL:Lp=605.0nm HWL:112.5nm
Render Index:Ra=80.3
R1 =78 R2 =90 R3 =96 R4 =78 R5 =78 R6 =88 R7 =81
R8 =53 R9 =-3 R10=77 R11=77 R12=70 R13=81 R14=99 R15=69

Photo Parameters:

Flux: 592.00 lm Fe: 1.7956 W Efficacy:100.6 lm/W


Electrical Parameters:

Lamp : U=228.7V I=0.02942A P=5.884W PF=0.8744

Instrument Status:

Scan Range:380.0nm-800.0nm Interval:5.0nm[0] Ip=41899(G=5,D=72)
REF=23399(R=4) %=-0.554% PMT: 36.2 centigrade [34.6]

Model placed on the Union market from 29/08/2022



EPREL registration number: 1292491

<https://eprel.ec.europa.eu/qr/1292491>

Supplier: Northern.no AS (Manufacturer)

Website: www.northern.no

Customer care service:

Name: Northern

Website: <https://northern.no/no/>

Email: post@northern.no

Phone: +47 40 00 70 37

Address:

Bygdøy alle 68

0265 OSLO

Norway