

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** Maytoni Decorative Lighting

**Supplier's address:** Maytoni GmbH, Feldstiege 98, 48161 Münster, DE

**Model identifier:** MOD415PL-L45BS4K

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	SMT		
Mains or non-mains:	MLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	Yes	Dimmable:	No


## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	45	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	2 799 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power ( $P_{on}$ ), expressed in W	40,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,10
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	0,10	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	84
Outer dimensions without separate control gear, lighting control	Height	1 800	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	600	
	Depth	600	
			See image in last page


parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	Yes	If yes, equivalent power (W)	45
		Chromaticity coordinates (x and y)	0,382 0,375
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	12	Survival factor	0,10
the lumen maintenance factor	0,10		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,68	Colour consistency in McAdam ellipses	4
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,1

(a)-: not applicable;

(b)-: not applicable;

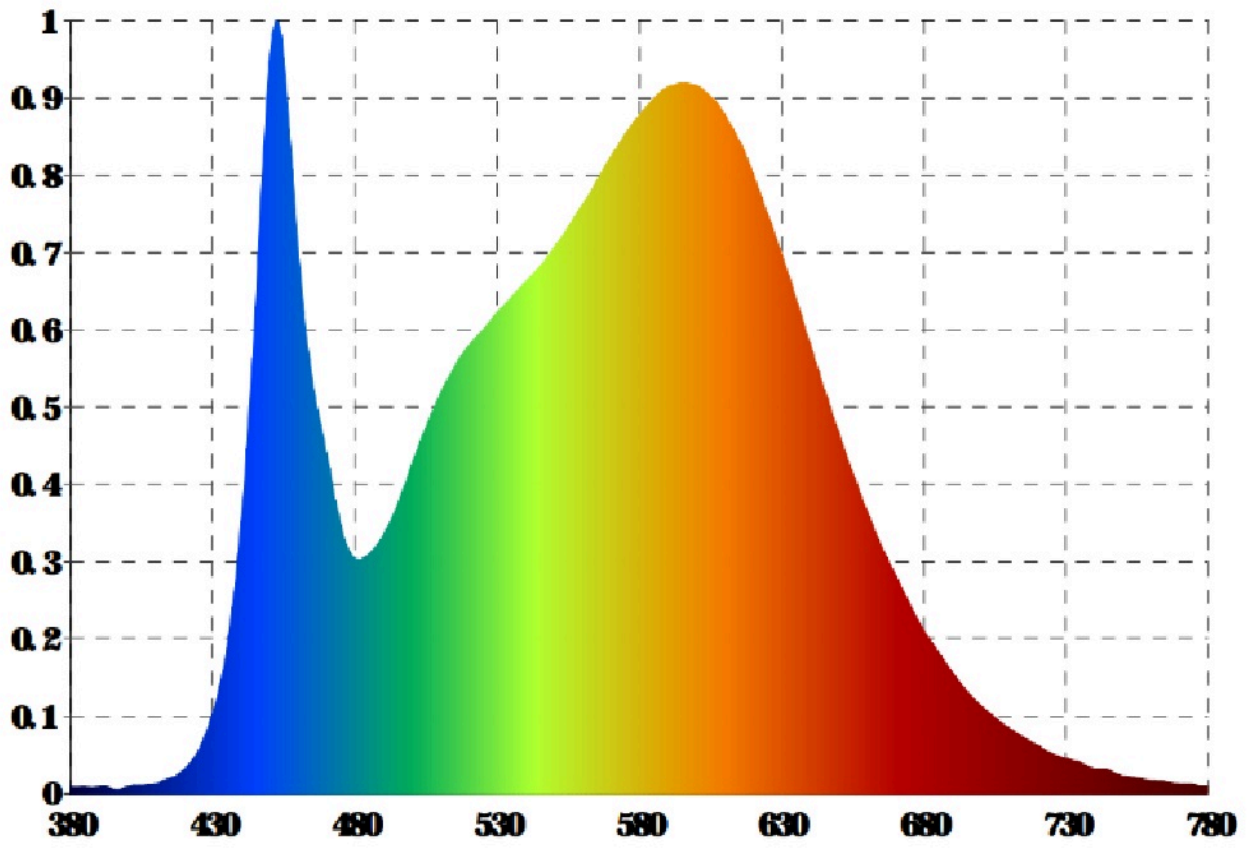

Model placed on the Union market from 08/02/2023



**EPREL registration number:** 1370239

<https://eprel.ec.europa.eu/qr/1370239>

**Supplier:** Maytoni GmbH (Manufacturer)

**Website:** [www.maytoni.de](http://www.maytoni.de)

**Customer care service:**

**Name:** Maytoni GmbH

**Website:** <https://maytoni.de/>

**Email:** [info@maytoni.de](mailto:info@maytoni.de)

**Phone:** +49 (30) 555 722 45

**Address:**

Feldstiege 98  
48161 Münster  
Germany