

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Maytoni Decorative Lighting

Supplier's address: Maytoni GmbH, Feldstiege 98, 48161 Münster, DE

Model identifier: MOD166PL-L30G3K

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	SMT		
Mains or non-mains:	MLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	Yes	Dimmable:	No


Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	29	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 204 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 560
On-mode power (P_{on}), expressed in W	28,8	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,10
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	0,10	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	1 500	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	180	
	Depth	1 400	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	Yes	If yes, equivalent power (W)	30
		Chromaticity coordinates (x and y)	0,481 0,429
Parameters for directional light sources:			
Peak luminous intensity (cd)	601	Beam angle in degrees, or the range of beam angles that can be set	180
Parameters for LED and OLED light sources:			
R9 colour rendering index value	0	Survival factor	0,90
the lumen maintenance factor	0,96		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ 1)	0,49	Colour consistency in McAdam ellipses	7
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,1

(a) '-': not applicable;

(b) '-': not applicable;

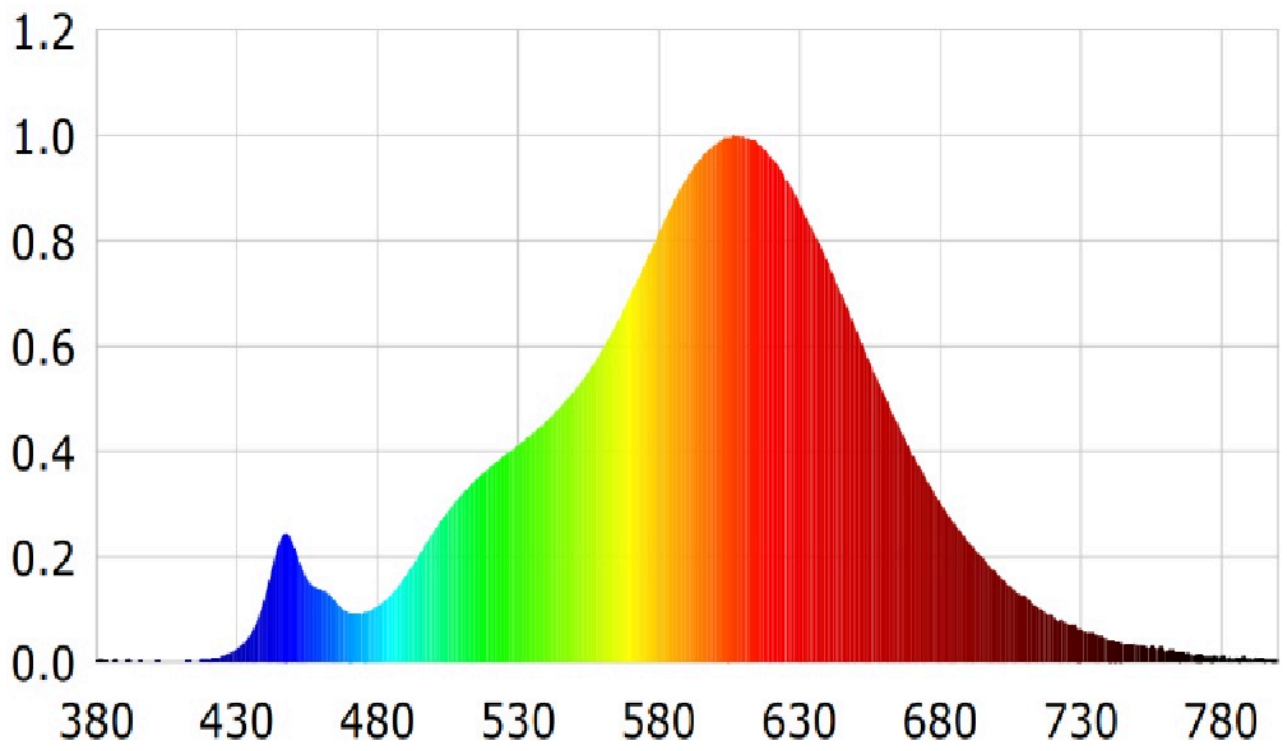

Model placed on the Union market from 09/02/2023



EPREL registration number: 1370276

<https://eprel.ec.europa.eu/qr/1370276>

Supplier: Maytoni GmbH (Manufacturer)

Website: www.maytoni.de

Customer care service:

Name: Maytoni GmbH

Website: <https://maytoni.de/>

Email: info@maytoni.de

Phone: +49 (30) 555 722 45

Address:

Feldstiege 98
48161 Münster
Germany