

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ORION

**Supplier's address:** Qualitätssicherung, Oberlaaerstraße 284, 1230 Wien, AT

**Model identifier:** LM E14/2W i.m. (Kerze/2700K/180lm)

## Type of light source:

|   |     |                                 |      |
|---|-----|---------------------------------|------|
| Lighting technology used:                           | LED | Non-directional or directional: | NDLS |
| Light source cap-type (or other electric interface) | E14 |                                 |      |
| Mains or non-mains:                                 | MLS | Connected light source (CLS):   | No   |
| Colour-tuneable light source:                       | No  | Envelope:                       | -    |
| High luminance light source:                        | No  |                                 |      |
| Anti-glare shield:                                  | No  | Dimmable:                       | Yes  |

## Product parameters

| Parameter  | Value                | Parameter  | Value   |
|--|----------------------|--|---|
| <b>General product parameters:</b>   |                      |  |   |
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer  | 2                    | Energy efficiency class  | F   |
| Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 180 in Sphere (360°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 2 700   |
| On-mode power ( $P_{on}$ ), expressed in W   | 2,0                  | Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal   | 0,00  |
| Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal  | -                    | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set   | 80  |
| Outer dimensions without separate control gear, lighting control   | Height               | 98   | Spectral power distribution in the range 250 nm to 800 nm, at full-load |
|  | Width                | 35   |   |
|  | Depth                | 35   |   |
|  |                      |  | See image in last page  |

|   |      |                                       |                |
|---|------|---------------------------------------|----------------|
| parts and non-lighting control parts, if any (millimetre)   |      |                                       |                |
| Claim of equivalent power <sup>(a)</sup>  | Yes  | If yes, equivalent power (W)          | 18             |
|   |      | Chromaticity coordinates (x and y)    | 0,463<br>0,420 |
| <b>Parameters for LED and OLED light sources:</b>   |      |                                       |                |
| R9 colour rendering index value   | 0    | Survival factor                       | 0,90           |
| the lumen maintenance factor  | 0,94 |                                       |                |
| <b>Parameters for LED and OLED mains light sources:</b>   |      |                                       |                |
| displacement factor (cos $\phi_1$ )   | 0,50 | Colour consistency in McAdam ellipses | 6              |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | -(b) | If yes then replacement claim (W)     | -              |
| Flicker metric (Pst LM)   | 1,0  | Stroboscopic effect metric (SVM)      | 0,4            |

(a)-: not applicable;

(b)-: not applicable;


**Table 3 : DIM-C35-E14-2W-Frost-2700K**

| Sample No. | Initial Φuse (lm) | 3600H Φuse (lm) | X <sub>LMF,MIN</sub> % at 3600H | Survival factor at 3600H | Measured beam angle (°) | Measured I <sub>max</sub> (cd) | Measured light output within π sr |
|------------|-------------------|-----------------|---------------------------------|--------------------------|-------------------------|--------------------------------|-----------------------------------|
| 1#         | 187.2             | 176.5           | 94.3%                           | Yes                      | -                       | -                              | -                                 |
| 2#         | 183.7             | 173.0           | 94.2%                           | Yes                      | -                       | -                              | -                                 |
| 3#         | 186.1             | 175.5           | 94.3%                           | Yes                      | -                       | -                              | -                                 |
| 4#         | 186.5             | 175.5           | 94.1%                           | Yes                      | -                       | -                              | -                                 |
| 5#         | 182.2             | 172.0           | 94.4%                           | Yes                      | -                       | -                              | -                                 |
| 6#         | 188.7             | 177.9           | 94.3%                           | Yes                      | -                       | -                              | -                                 |
| 7#         | 185.3             | 175.1           | 94.5%                           | Yes                      | -                       | -                              | -                                 |
| 8#         | 182.1             | 171.9           | 94.4%                           | Yes                      | -                       | -                              | -                                 |
| 9#         | 187.0             | 176.5           | 94.4%                           | Yes                      | -                       | -                              | -                                 |
| 10#        | 183.5             | 172.9           | 94.2%                           | Yes                      | -                       | -                              | -                                 |
| Average    | 185.2             | 174.7           | 94.2%                           | Yes                      | -                       | -                              | -                                 |
| Required   | ≥180              | --              | ≥ 94%                           | ≥ 90%                    | -                       | -                              | -                                 |


**Table 4 for model LED driver**

| Sample No. | Measured voltage(V) | Measured current (mA) | Input wattage (W) | Output wattage (W) | Energy efficiency | P <sub>no</sub> (W) | P <sub>sb</sub> (W) | P <sub>net</sub> (W) |
|------------|---------------------|-----------------------|-------------------|--------------------|-------------------|---------------------|---------------------|----------------------|
| 1#         | --                  | --                    | --                | --                 | --                | --                  | --                  | --                   |
| 2#         | --                  | --                    | --                | --                 | --                | --                  | --                  | --                   |
| 3#         | --                  | --                    | --                | --                 | --                | --                  | --                  | --                   |
| Average    | --                  | --                    | --                | --                 | --                | --                  | --                  | --                   |
| Required   | --                  | --                    | --                | --                 | --                | --                  | --                  | --                   |

**Table 5: Spectrum & Polar Plot of DIM-C35-E14-2W-Frost-2700K**

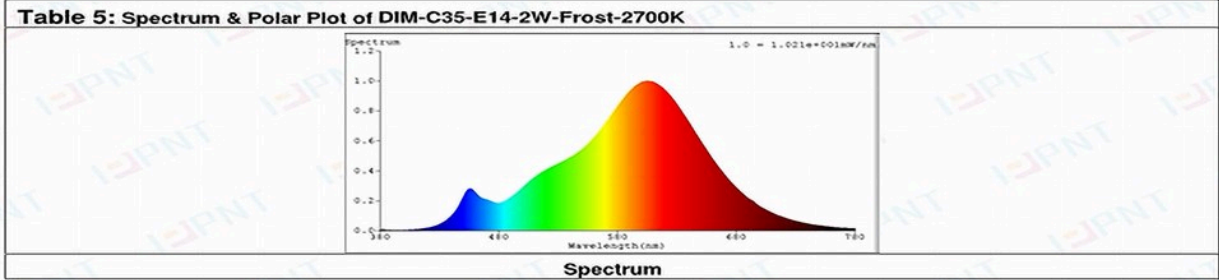

Model placed on the Union market from 31/01/2023



**EPREL registration number:** 1397515

<https://eprel.ec.europa.eu/qr/1397515>

**Supplier:** Orion Leuchten-Fabrik Molecz & Sohn Gesellschaft m.b.H (Manufacturer)

**Website:** [www.orionleuchten.at](http://www.orionleuchten.at)

**Customer care service:**

**Name:** Qualitätssicherung

**Website:** [www.orionleuchten.at](http://www.orionleuchten.at)

**Email:** [a.yasar@orion.co.at](mailto:a.yasar@orion.co.at)

**Phone:** 0043676842740866

**Address:**

Oberlaaerstraße 284  
1230 Wien  
Austria