# **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

### Supplier's name or trade mark: UMAGE

Supplier's address: UMAGE ApS, Havnegade 29, 1058 Copenhagen, DK

Model identifier: 2543 (light-source)

# Type of light source:

| Lighting technology used:                              | LED                              | Non-directional or directional: | NDLS                            |
|--------------------------------------------------------|----------------------------------|---------------------------------|---------------------------------|
| Light source cap-type<br>(or other electric interface) | Custom LED PCB<br>20,2V DC 550mA |                                 |                                 |
| Mains or non-mains:                                    | NMLS                             | Connected light source (CLS):   | No                              |
| Colour-tuneable light source:                          | No                               | Envelope:                       | -                               |
| High luminance light source:                           | No                               |                                 |                                 |
| Anti-glare shield:                                     | No                               | Dimmable:                       | Only with spe-<br>cific dimmers |


#### **Product parameters**

| Parameter                              |                                                                                 | Value                     | Parameter                                                                                                                                                                                | Value        |  |  |
|----------------------------------------|---------------------------------------------------------------------------------|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|--|--|
| General product parameters:            |                                                                                 |                           |                                                                                                                                                                                          |              |  |  |
| 0,                                     | nption in on-<br>00 h), rounded<br>st integer                                   | 12                        | Energy efficiency<br>class                                                                                                                                                               | D            |  |  |
| dicating if it refe<br>a sphere (360°) | s flux (φuse), in-<br>ers to the flux in<br>, in a wide cone<br>rrow cone (90º) | 1 732 in<br>Sphere (360°) | Correlated colour<br>temperature,<br>rounded to the near-<br>est 100 K, or the<br>range of correlat-<br>ed colour temper-<br>atures, rounded to<br>the nearest 100 K,<br>that can be set | 2 900        |  |  |
| On-mode pow<br>pressed in W            | ver (P <sub>on</sub> ), ex-                                                     | 11,1                      | Standby power (P <sub>sb</sub> ),<br>expressed in W and<br>rounded to the sec-<br>ond decimal                                                                                            | 0,00         |  |  |
| (P <sub>net</sub> ) for CLS, e         | andby power<br>expressed in W<br>the second dec-                                | -                         | Colour rendering in-<br>dex, rounded to the<br>nearest integer, or<br>the range of CRI-val-<br>ues that can be set                                                                       | 84           |  |  |
| Outer dimen-                           | Height                                                                          | 295                       | Spectral power dis-                                                                                                                                                                      | See image    |  |  |
| sions without                          | Width                                                                           | 295                       | tribution in the                                                                                                                                                                         | in last page |  |  |
| separate con-<br>trol gear, light-     | Depth                                                                           | 2                         | range 250 nm to 800<br>nm, at full-load                                                                                                                                                  |              |  |  |

| ing control<br>parts and non-<br>lighting con-<br>trol parts, if<br>any (millime-<br>tre)<br>Claim of equivalent power <sup>(a)</sup> | -    | If yes, equivalent<br>power (W)<br>Chromaticity coordi-<br>nates (x and y) | - 0,438 0,400 |  |  |  |
|---------------------------------------------------------------------------------------------------------------------------------------|------|----------------------------------------------------------------------------|---------------|--|--|--|
| Parameters for LED and OLED light sources:                                                                                            |      |                                                                            |               |  |  |  |
| R9 colour rendering index value                                                                                                       | 13   | Survival factor                                                            | 0,90          |  |  |  |
| the lumen maintenance factor                                                                                                          | 0,96 |                                                                            |               |  |  |  |
| $(\mathbf{a})$                                                                                                                        |      |                                                                            |               |  |  |  |

(a)'-' : not applicable;

(b)<sub>'-'</sub> : not applicable;

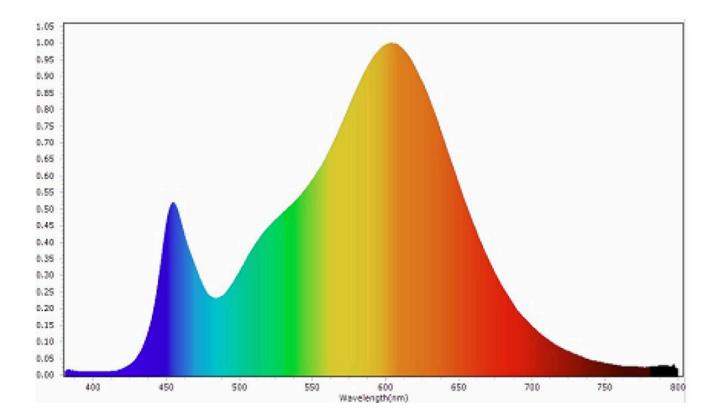

Model placed on the Union market from 02/07/2023



# **EPREL registration number:** 1507588

Supplier: UMAGE ApS (Manufacturer)

#### **Customer care service:**

Name: UMAGE ApS

Email: info@umage.com

### Address: Havnegade 29 1058 Copenhagen

Denmark

https://eprel.ec.europa.eu/qr/15 07588

Website: www.umage.com

## Website: www.umage.com

Phone: +45 31 39 31 31