Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark:	Design By Us
--------------------------------	--------------

Supplier's address: Design By Us, Rentemestervej 43, 2400 Copenhagen NV, DK

Model identifier: Globe Bulb Ø80 - Milky


_	•			
Type	Λt	light	COLL	rca.
IVDE	VI.	HEILL	SOU	LC.

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type	E27		
(or other electric interface)			
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes
Product parameters			

Product parameters				
Parameter		Value	Parameter	Value
	General product parameters:			
Energy consur mode (kWh/10 up to the neare	00 h), rounded	5	Energy efficiency class	E
dicating if it refe a sphere (360º)	s flux (фuse), ineers to the flux in, in a wide cone arrow cone (90º)	600 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode pow pressed in W	ver (P _{on}), ex-	5,2	Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal	0,00
(P _{net}) for CLS, 6	candby power expressed in W the second dec-	-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	90
Outer dimen-	Height	120	Spectral power dis-	See image
sions without	Width	80	tribution in the	in last page
separate con- trol gear, light- ing control	Depth	80	range 250 nm to 800 nm, at full-load	

parts and non- lighting con- trol parts, if any (millime- tre)			
Claim of equivalent power ^(a)	Yes	If yes, equivalent power (W)	50
		Chromaticity coordi-	0,460
		nates (x and y)	0,415
Parameters for LED and OLED I	ight sources:		
R9 colour rendering index value	9 0	Survival factor	1,00
the lumen maintenance factor	0,96		
Parameters for LED and OLED mains light sources:			
displacement factor (cos φ1)	0,50	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	t	If yes then replace- ment claim (W)	-
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	-

(a)'-': not applicable; (b)'-': not applicable;

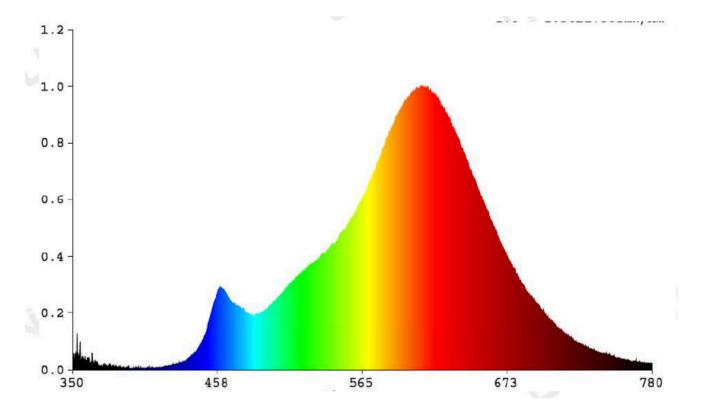

Model placed on the Union market from 01/01/2022



EPREL registration number: 1513511 https://eprel.ec.europa.eu/qr/15

13511

Supplier: Design By Us ApS (Importer) Website: design-by-us.com

Customer care service:

Name: Design By Us Website: www.design-by-us.com

Email: mail@design-by-us.com Phone: +4538118086

Address:

Rentemestervej 43 2400 Copenhagen NV

Denmark