

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** Fritz Hansen A/S

**Supplier's address:** Jesper Langballe, Allerødvej 8, 3450 Allerød Danmark, DK

**Model identifier:** MS011

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Containing product with LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	Yes	Dimmable:	Yes


## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	10	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	503 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 703
On-mode power ( $P_{on}$ ), expressed in W	10,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,30
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90
Outer dimensions without separate control gear, lighting control	Height	1 180	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	772	
	Depth	215	
			See image in last page


parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,462 0,415
<b>Parameters for directional light sources:</b>			
Peak luminous intensity (cd)	592	Beam angle in degrees, or the range of beam angles that can be set	105
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	51	Survival factor	1,00
the lumen maintenance factor	0,70		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,98	Colour consistency in McAdam ellipses	3
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0

(a) '-': not applicable;

(b) '-': not applicable;

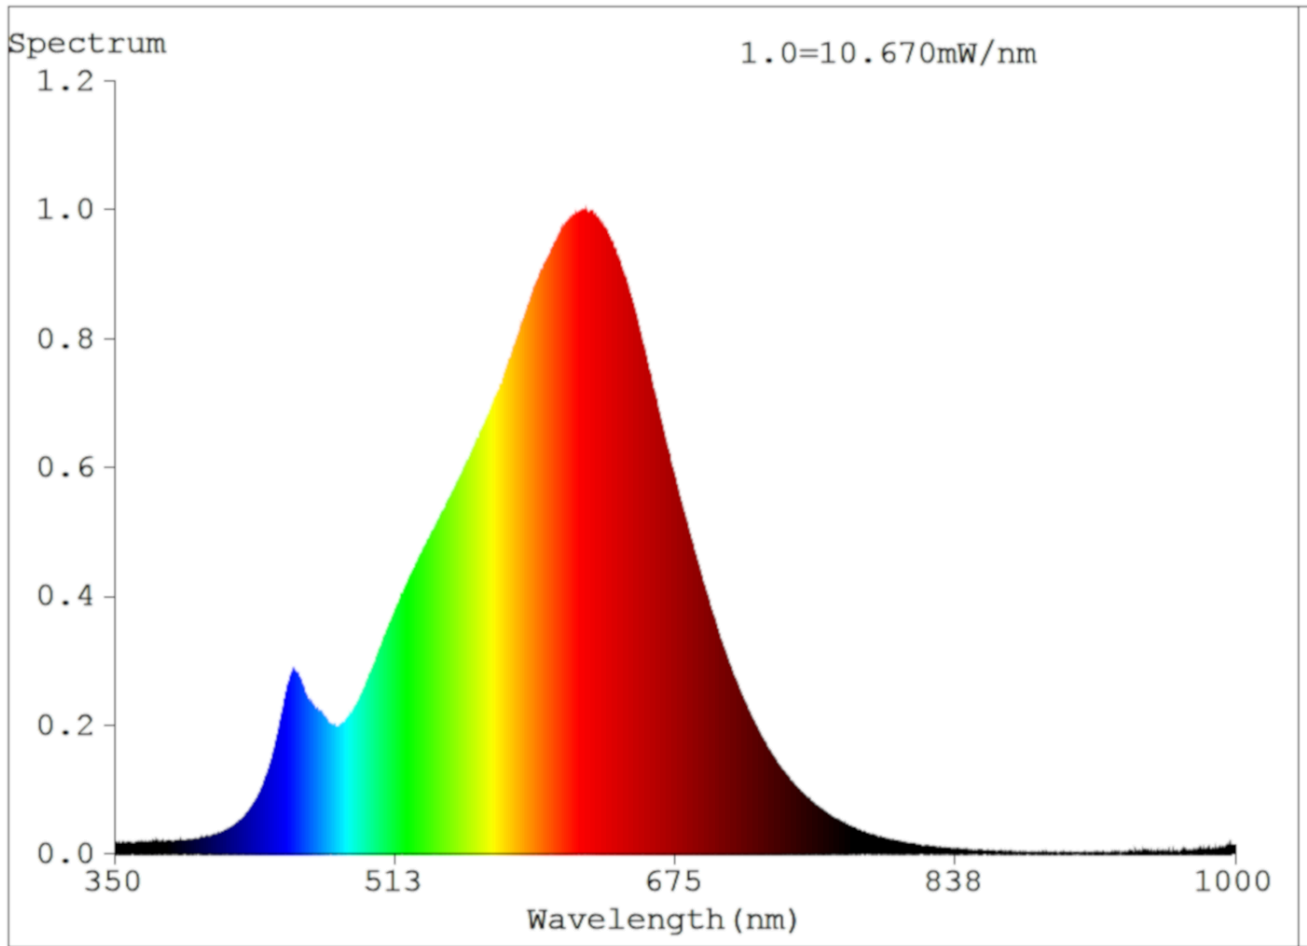

Model placed on the Union market from 01/09/2023



**EPREL registration number:** 1515131

<https://eprel.ec.europa.eu/qr/1515131>

**Supplier:** Fritz Hansen A/S (Manufacturer)

**Website:** [www.Fritzhansen.com](http://www.Fritzhansen.com)

**Customer care service:**

**Name:** Jesper Langballe

**Website:** [www.fritzhansen.com](http://www.fritzhansen.com)

**Email:** [JETL@fritzhansen.com](mailto:JETL@fritzhansen.com)

**Phone:** +45 25190795

**Address:**

Allerødvej 8  
3450 Allerød  
Denmark