

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: LIGHT-POINT

Supplier's address: Legal, Grønnegade 3, 2. tv 1107 København K Danmark

Model identifier: 271042 MIRAGE W1

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	LED		
Mains or non-mains:	MLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	9	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	735 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2700...3000
On-mode power (P_{on}), expressed in W	9,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	0,00	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	94...1
Outer dimensions without separate control gear, lighting control	Height	140	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	140	
	Depth	15	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,434 0,399
Parameters for LED and OLED light sources:			
R9 colour rendering index value	65	Survival factor	0,90
the lumen maintenance factor	0,98		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,96	Colour consistency in McAdam ellipses	5
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	-

(a)-: not applicable;


(b)-: not applicable;

Spectral test report for lamp

Product type : 271041 Test time : 2023-01-05 14:59:04
 Product No. : CW332492W00900-NA-CE-V806 2700K Test equipment : SPEC-2000A Spectrometer
 Manufacturer : VELLNICE Operator : QC1

CIE Color Parameter

Chromaticity coordinates: $x=0.4720$ $y=0.4231$ $u=0.2652$ $v=0.3560$ $u^*=0.2652$ $v^*=0.5340$
 Color temperature: 2826 K (d.u.v.e=+0.00352) Color difference: SDCM(IEC,F2700)=5.8 Main Wl: $\lambda_d=584.02$ nm Purity: 0.275
 Peak wavelength: $\lambda_p=619.4$ nm Centroid wavelength: 598.7 nm FWHM: $\Delta\lambda_c=127.4$ nm Color ratio: R=0.288 G=0.689 B=0.023
 Color rendering index: Ra=91.7 Color Fidelity: Rf=88.31 Color Gamut: Rg=93.02 OAI=43.21
 R1=91.7 R2=96.4 R3=98.6 R4=94.1 R5=95.4 R6=95.5 R7=87.1 R8=74.3
 R9=48.9 R10=93.4 R11=96.4 R12=86.6 R13=93.0 R14=96.4 R15=83.8

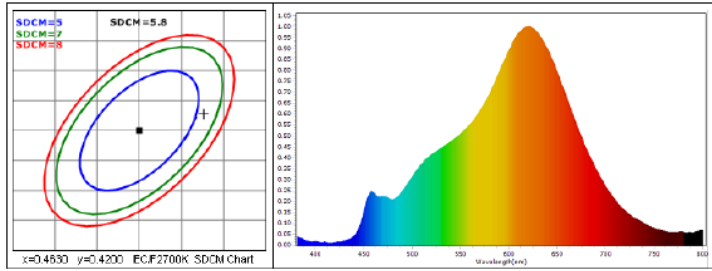

Optical Parameter

Luminous flux: 530.21 lm luminous efficiency: 85.14 lm/w Radiant flux: 1.941 W
 Energy efficiency index (EEI): 0.176 Energy efficiency class: A (EU 874/2012)

Electrical Parameter

Voltage(V): 230.80 Current(A): 0.0390 Watts(W): 8.140 Power factor: 0.9990
 Reverse leakage current(uA): 0.000 Reverse voltage(V): 0.0


Test Information

Temperature : 25 Deg C Humidity : 53
 Test range : 300-800nm : 1nm Peak AD : 44197 (67.4%)
 Preheat time : 0(min) Integral time : 131.05 (ms)

MEASUREFINE

Hangzhou HuiPu Instrument Co., Ltd. <http://www.measurefine.com>

Model placed on the Union market from 13/01/2023



EPREL registration number: 1612563

<https://eprel.ec.europa.eu/qr/1612563>

Supplier: LIGHT-POINT A/S (Manufacturer)

Website:

Customer care service:

Name: Legal

Website:

Email: bkr@light-point.com

Phone: +4522896666

Address:

Grønnegade 3, 2. tv
1107 København K
Danmark