## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or	trade mark:	Nuura
--------------------	-------------	-------

Supplier's address: Product Development, Frederiksgade 14, 2. 1265 København K Denmark

Model identifier: D60-2835-3C6B-12V-6W

_	•			
Type	Λt	liont	COLL	rca.
IVDC	vı	HIGHL	30 U	ı cc.


Lighting technology used:	LED	Non-directional or	DLS
		directional:	
Light source cap-type	DC-Micro-		
(or other electric interface)	connector		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes
Product parameters			

## **Product parameters**

Product parameters				
Parameter		Value	Parameter	Value
		General product p	arameters:	
Energy consummode (kWh/10 up to the neares	00 h), rounded	6	Energy efficiency class	G
dicating if it refe a sphere (360°)	s flux (фuse), in- ers to the flux in , in a wide cone rrow cone (90º)	463 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode pow pressed in W	ver (P <sub>on</sub> ), ex-	6,5	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	0,00
(P <sub>net</sub> ) for CLS, 6	andby power expressed in W the second dec-	-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	93
Outer dimen-	Height	5	Spectral power dis-	See image
sions without	Width	60	tribution in the	in last page
separate con- trol gear, light- ing control	Depth	60	range 250 nm to 800 nm, at full-load	

parts and non- lighting con- trol parts, if any (millime- tre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordi-	0,474
		nates (x and y)	0,419
Parameters for directional light sources:			
Peak luminous intensity (cd)	168	Beam angle in degrees, or the range of beam angles that can be set	120
Parameters for LED and OLED light sources:			
R9 colour rendering index value	56	Survival factor	1,00
the lumen maintenance factor	1,00		

(a)'-': not applicable; (b)'-': not applicable;

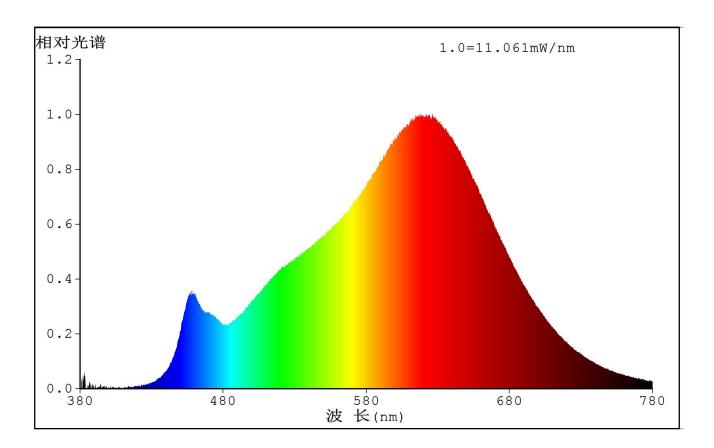

Model placed on the Union market from 01/09/2023 to 13/06/2025



**EPREL registration number:** 1628846 https://eprel.ec.europa.eu/qr/16

28846

Supplier: Nuura ApS (Manufacturer) Website: www.nuura.com

**Customer care service:** 

Name: Product Development Website: www.nuura.com

Email: rlj@nuura.com Phone: +4560244639

Address:

Frederiksgade 14, 2. 1265 København K

Denmark