

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: GLOBO Handels GmbH

Supplier's address: GLOBO Handels GmbH, Gewerbestraße 3, 9184 St. Peter, AT

Model identifier: 67284-18

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	NO		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	18	Energy efficiency class	E
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	2 280 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W	18,1	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	81
Outer dimensions without separate control gear, lighting control	Height	8	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	1 100	
	Depth	16	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,428 0,397
Parameters for LED and OLED light sources:			
R9 colour rendering index value	3	Survival factor	1,00
the lumen maintenance factor	0,96		

(a) : not applicable;

(b) : not applicable;

Lightsource Test Report (1/2)

Product Information

Product Number: 67284-18-裸灯

Submitted Unit: p


CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.4280$ $y=0.3973$ $u(u')=0.2477$ $v=0.3449$ $v'=0.5173$
 CCT: $T_c=3100K$ ($duv=-0.00146$) Color Ratio: $R=0.223$ $G=0.750$ $B=0.028$
 Peak Wavelength: 604.0nm Half Bandwidth: 127.2nm
 Dominant Wavelength: 583.0nm Color Purity: 0.477
 CRI: $R_a=81.9$ TM30: $R_f=84$, $R_g=96$
 GAI: $GAI_BB_8=96.3$, $GAI_BB_15=103.0$, $GAI_EES=57.9$

R1 =80	R2 =91	R3 =96	R4 =80	R5 =81	R6 =89	R7 =81	R8 =57
R9 =3	R10=79	R11=79	R12=72	R13=83	R14=98	R15=73	

 Color Quality Scale: $Q_a=81.4$, $Q_f=82.7$, $Q_p=83.1$, $Q_g=91.7$

Q1 =78	Q2 =96	Q3 =82	Q4 =78	Q5 =82	Q6 =83	Q7 =83	Q8 =85
Q9 =96	Q10=89	Q11=85	Q12=82	Q13=81	Q14=71	Q15=73	

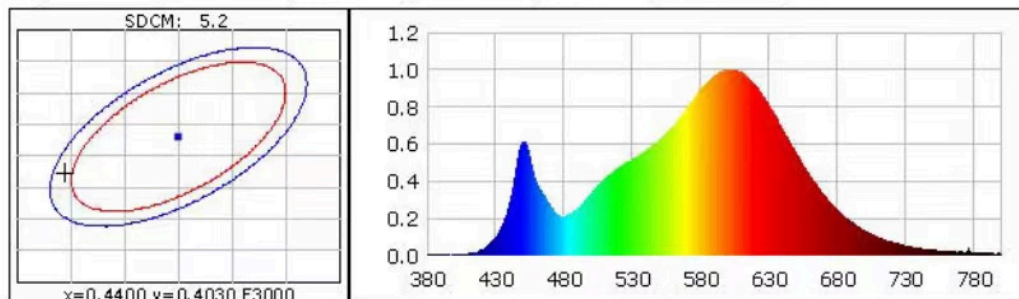

Photometric Parameters

Luminous Flux: 2081.70 lm Efficiency: 115.52 lm/W Radiant Power: 9.282 W
 Total mains efficacy: 115.52 lm/W Energy Efficiency Class: E (EU 2019/2015)
 Pupil Flux: 2980.02 Plm Pupil Lumens Per Watt: 165.37 Plm/W Pupil Factor (Kp): 1.291

Electric Parameters

Voltage: 232.10V Current: 0.1320A Power: 18.02W
 Power Factor: 0.5880 Frequency: 50.00Hz


Test Information

Scan Range: 380~800:1nm Photometric Method: sphere-spectroradiometer
 Stabilization Time: 0 ms ALC.: 1.0000 Photometric Condition: Sphere diameter: 1.50m, 4T
 Max of Signal: 48482 (3290) CCD Integration Time: 233.69 ms

Condition: $T_x:34.9^\circ C$, $T_i:35.9^\circ C$, R.H.:60%
 Test Lab:
 Operator:

Test Device: Inventfine CMS-2S (Plus)
 Test Time: 2022-07-29 09:12:48
 Inspector:

Model placed on the Union market from 10/02/2022



EPREL registration number: 1634153

<https://eprel.ec.europa.eu/qr/1634153>

Supplier: Globo Handels GmbH (Importer)

Website:

Customer care service:

Name: GLOBO Handels GmbH

Website:

Email: office@globo-lighting.com

Phone: +43425332050

Address:

Gewerbestraße 3
9184 St. Peter
Austria