

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: GLOBO Handels GmbH

Supplier's address: GLOBO Handels GmbH, Gewerbestraße 3, 9184 St. Peter, AT

Model identifier: 416080WD2R-CCT

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	LED		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	Yes	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	24	Energy efficiency class	E
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	3 409 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700 or 4 000 or 6 500
On-mode power (P_{on}), expressed in W	24,9	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	17	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	2	
	Depth	338	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,426 0,401
Parameters for LED and OLED light sources:			
R9 colour rendering index value	-2	Survival factor	1,00
the lumen maintenance factor	0,96		

(a) : not applicable;

(b) : not applicable;

Lightsource Test Report (1/2)

Product Information

Product Number: 416080WD22R-CCT? Submitted Unit: p


CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.4265$ $y=0.4010$ $u(u')=0.2451$ $v=0.3457$ $v'=0.5186$
 CCT: $T_c=3159K$ ($duv=0.00034$) Color Ratio: $R=0.216$ $G=0.759$ $B=0.025$
 Peak Wavelength: 599.7nm Half Bandwidth: 131.2nm
 Dominant Wavelength: 582.0nm Color Purity: 0.484
 CRI: $R_a=80.6$ TM30: $R_f=83$, $R_g=96$
 GAI: $GAI_BB_8=92.3$, $GAI_BB_15=98.2$, $GAI_EES=56.9$

R1 =78	R2 =88	R3 =96	R4 =79	R5 =79	R6 =86	R7 =82	R8 =57
R9 =-2	R10=73	R11=78	R12=68	R13=80	R14=98	R15=71	

Color Quality Scale: $Q_a=80.7$, $Q_f=82.0$, $Q_p=81.7$, $Q_g=91.2$

Q1 =77	Q2 =96	Q3 =81	Q4 =78	Q5 =81	Q6 =81	Q7 =82	Q8 =85
Q9 =96	Q10=88	Q11=84	Q12=82	Q13=81	Q14=69	Q15=71	

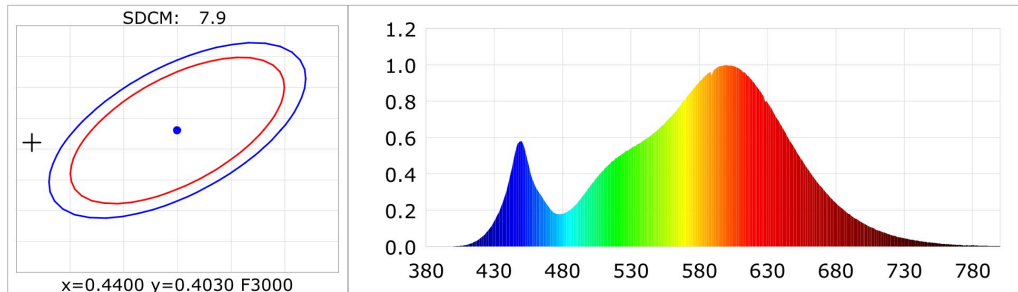

Photometric Parameters

Luminous Flux: 3409.55 lm Efficiency: 136.66 lm/W Radiant Power: 10.107 W
 Total mains efficacy: 136.66 lm/W Energy Efficiency Class: D (EU 2019/2015)
 Pupil Flux: 4363.75 Plm Pupil Lumens Per Watt: 174.90 Plm/W Pupil Factor (Kp): 1.280

Electric Parameters

Voltage: 231.50V Current: 0.1110A Power: 24.95W
 Power Factor: 0.9700 Frequency: 50.00Hz


Test Information

Scan Range: 380~800:1nm	Photometric Method: sphere-spectroradiometer
Stabilization Time: 0 ms ALC.: 1.0000	Photometric Condition: Sphere diameter: 1.50m, 4T
Max of Signal: 46473 (1932)	CCD Integration Time: 155.69 ms

Condition: $T_x:18.6^\circ C$, $T_i:19.8^\circ C$, R.H.:60%
 Test Lab:
 Operator:

Test Device: Inventfine CMS-2S (Plus)
 Test Time: 2021-12-20 18:20:59
 Inspector:

Model placed on the Union market from 10/12/2021



EPREL registration number: 1671433

<https://eprel.ec.europa.eu/qr/1671433>

Supplier: Globo Handels GmbH (Importer)

Website:

Customer care service:

Name: GLOBO Handels GmbH

Website:

Email: office@globo-lighting.com

Phone: +43425332050

Address:

Gewerbestraße 3
9184 St. Peter
Austria