## **Product Information Sheet**

and rounded to the second dec-

Height

Width

Depth

imal

Outer dimen-

sions without

separate con-

trol gear, light-

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's address: Lucide NV, B	isschoppenhoflaan	145. 2100 Deurne. BF	
Model identifier: 36721-03-30		,	
Type of light source:			
Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type	Integrated LED		
(or other electric interface)	table lamp rechargeable		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes
	Product para	meters	
Parameter	Value	Parameter	Value
	General product p	parameters:	
Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer	3	Energy efficiency class	F
Useful luminous flux (φuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	240 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P <sub>on</sub> ), ex- pressed in W	3,0	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	0,50
Networked standby power	_	Colour rendering in-	80

1 380

381

220

nearest integer, or

the range of CRI-values that can be set

Spectral power dis-

range 250 nm to 800

nm, at full-load

in

the

tribution


See image

in last page

ing control parts and non-lighting control parts, if any (millimetre)					
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-		
		Chromaticity coordi-	0,463		
		nates (x and y)	0,420		
Parameters for directional light sources:					
Peak luminous intensity (cd)	109	Beam angle in degrees, or the range of beam angles that can be set	120		
Parameters for LED and OLED light sources:					
R9 colour rendering index value	-14	Survival factor	0,90		
the lumen maintenance factor	0,96				

(a)<sub>'-'</sub>: not applicable;

(b)<sub>'-'</sub> : not applicable;

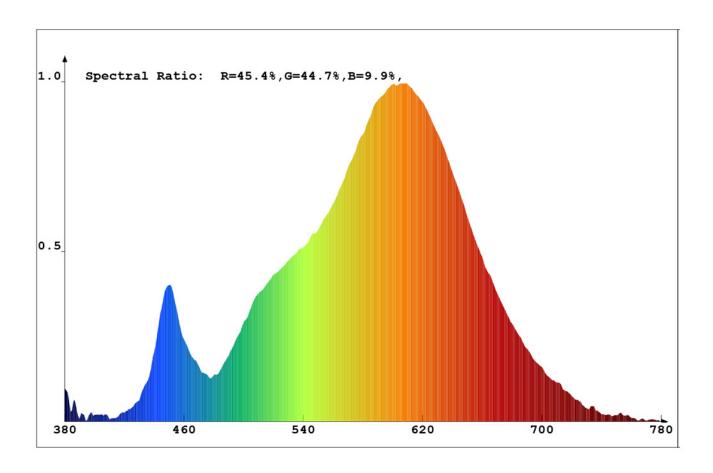

Model placed on the Union market from 09/08/2023



**EPREL registration number:** 1699659 https://eprel.ec.europa.eu/qr/16

99659

Supplier: Lucide (Manufacturer) Website: www.lucide.be

**Customer care service:** 

Name: Lucide NV Website: www.lucide.com

Email: info@lucide.com Phone: +3233662204

Address:

Bisschoppenhoflaan 145

2100 Deurne Belgium