

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: GLOBO Handels GmbH

Supplier's address: GLOBO Handels GmbH, Gewerbestraße 3, 9184 St. Peter, AT

Model identifier: 416080WD2R

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	LED		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	24	Energy efficiency class	E
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	3 224 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W	24,1	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,50
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	81
Outer dimensions without separate control gear, lighting control	Height	500	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	20	
	Depth	20	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,426 0,400
Parameters for LED and OLED light sources:			
R9 colour rendering index value	1	Survival factor	1,00
the lumen maintenance factor	0,96		

(a) : not applicable;

(b) : not applicable;

Lightsource Test Report (1/2)

Product Information

Product Number: 416080WWD2R裸灯

Submitted Unit: p


CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.4264$ $y=0.4006$ $u(u')=0.2452$ $v=0.3456$ $v'=0.5184$
 CCT: $T_c=3158K$ ($duv=0.00020$) Color Ratio: $R=0.216$ $G=0.758$ $B=0.025$
 Peak Wavelength: 599.7nm Half Bandwidth: 131.6nm
 Dominant Wavelength: 582.1nm Color Purity: 0.482
 CRI: $R_a=80.8$ TM30: $R_f=83$, $R_g=96$
 GAI: $GAI_BB_8=92.7$, $GAI_BB_15=98.6$, $GAI_EES=57.1$

R1 =79	R2 =88	R3 =96	R4 =79	R5 =79	R6 =86	R7 =82	R8 =57
R9 =-1	R10=74	R11=78	R12=68	R13=81	R14=98	R15=71	

 Color Quality Scale: $Q_a=80.8$, $Q_f=82.2$, $Q_p=81.9$, $Q_g=91.3$

Q1 =77	Q2 =96	Q3 =81	Q4 =78	Q5 =81	Q6 =82	Q7 =82	Q8 =86
Q9 =96	Q10=88	Q11=84	Q12=82	Q13=81	Q14=69	Q15=72	

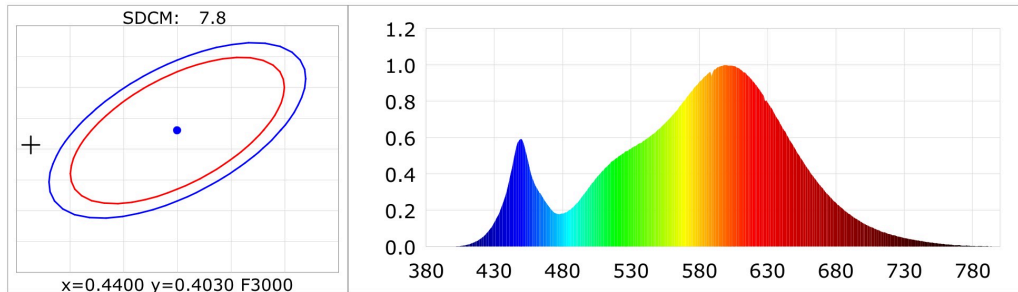

Photometric Parameters

Luminous Flux: 3224.67 lm Efficiency: 133.97 lm/W Radiant Power: 9.573 W
 Total mains efficacy: 133.97 lm/W Energy Efficiency Class: E (EU 2019/2015)
 Pupil Flux: 4134.79 Plm Pupil Lumens Per Watt: 171.78 Plm/W Pupil Factor (Kp): 1.282

Electric Parameters

Voltage: 231.20V Current: 0.1070A Power: 24.07W
 Power Factor: 0.9690 Frequency: 50.00Hz

Test Information


Scan Range: 380~800:1nm
 Stabilization Time: 0 ms ALC.: 1.0000
 Max of Signal: 46892 (1905)

Photometric Method: sphere-spectroradiometer
 Photometric Condition: Sphere diameter: 1.50m, 4T
 CCD Integration Time: 165.89 ms

Condition: $T_x:18.5^{\circ}C$, $T_i:19.6^{\circ}C$, R.H.:60%
 Test Lab:
 Operator:

Test Device: Inventfine CMS-2S (Plus)
 Test Time: 2021-12-20 18:14:58
 Inspector:

Model placed on the Union market from 28/11/2022



EPREL registration number: 1743224

<https://eprel.ec.europa.eu/qr/1743224>

Supplier: Globo Handels GmbH (Importer)

Website:

Customer care service:

Name: GLOBO Handels GmbH

Website:

Email: office@globo-lighting.com

Phone: +43425332050

Address:

Gewerbestraße 3
9184 St. Peter
Austria