## **Product Information Sheet**


COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

sources								
Supplier's name or trade mark: INNR Supplier's address: Innr Servicedesk, Innr, IBRS 1232, 1200 WB, NL								
								Model identifier: RB 243
Type of light so	urce:							
Lighting techno	logy used:	LED	Non-directional or directional:	NDLS				
Light source cap-type		E14						
(or other electric interface)								
Mains or non-mains:		MLS	Connected light source (CLS):	Yes				
Colour-tuneable light source:		No	Envelope:	-				
High luminance light source:		No						
Anti-glare shield:		No	Dimmable:	Only with spe- cific dimmers				
Product parameters								
Parameter		Value	Parameter	Value				
General product parameters:								
Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer		5	Energy efficiency class	F				
Useful luminous flux (φuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		470 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700				
On-mode power (P <sub>on</sub> ), expressed in W		4,6	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	0,20				
Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal		0,20	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	82				
Outer dimen-	Height	106	Spectral power dis-	See image				
sions without	Width	37	tribution in the	in last page				
separate con- trol gear, light-		37	range 250 nm to 800 nm, at full-load					

ing control parts and non-lighting control parts, if any (millimetre)							
Claim of equivalent power <sup>(a)</sup>		Yes	If yes, equivalent power (W)	40			
			Chromaticity coordi-	0,463			
			nates (x and y)	0,420			
Parameters for LED and OLED light sources:							
R9 colour rendering index value		7	Survival factor	1,00			
the lumen maintenance factor		0,96					
Parameters for LED and OLED mains light sources:							
displacement factor (cos φ1)		0,82	Colour consistency in McAdam ellipses	3			
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.		_(b)	If yes then replace- ment claim (W)	-			
Flicker metric (Pst LM)		0,1	Stroboscopic effect metric (SVM)	0,1			

(a)<sub>'-'</sub> : not applicable;

(b)<sub>'-'</sub> : not applicable;

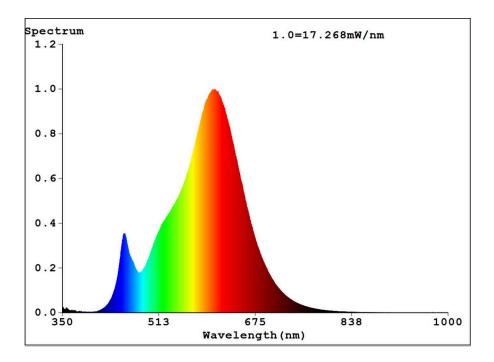

Model placed on the Union market from 25/01/2024



**EPREL registration number:** 1775243 https://eprel.ec.europa.eu/qr/17

**75243** 

Supplier: Innr Lighting B.V. (Manufacturer) Website: www.innr.com

**Customer care service:** 

Name: Innr Servicedesk Website: www.innr.com

Email: service@innr.com Phone: +31357440388

Address:

Innr, IBRS 1232, 1200 WB, NL