

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** Maytoni Decorative Lighting

**Supplier's address:** Maytoni GmbH, Feldstiege 98, 48161 Münster, DE

**Model identifier:** MOD229TL-L3B3K2

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	SMT		
Mains or non-mains:	MLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No


## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	3	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	354 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 200 or 3 000 or 4 000
On-mode power ( $P_{on}$ ), expressed in W	3,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,10
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	0,10	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90
Outer dimensions without separate control gear, lighting control	Height	180	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	120	
	Depth	120	
			See image in last page


parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	Yes	If yes, equivalent power (W)	3
		Chromaticity coordinates (x and y)	0,443 0,407
<b>Parameters for directional light sources:</b>			
Peak luminous intensity (cd)	107	Beam angle in degrees, or the range of beam angles that can be set	120
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	54	Survival factor	0,10
the lumen maintenance factor	0,10		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,79	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0

(a) '-': not applicable;

(b) '-': not applicable;

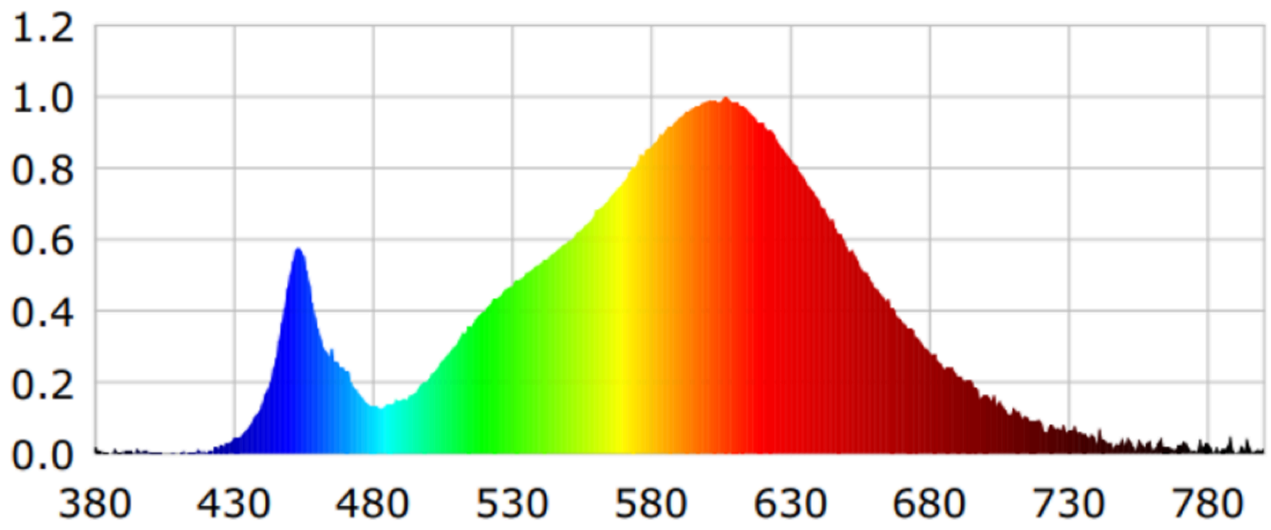

Model placed on the Union market from 01/01/2024



**EPREL registration number:** 1815207

<https://eprel.ec.europa.eu/qr/1815207>

**Supplier:** Maytoni GmbH (Manufacturer)

**Website:** [www.maytoni.de](http://www.maytoni.de)

**Customer care service:**

**Name:** Maytoni GmbH

**Website:** <https://maytoni.de/>

**Email:** [info@maytoni.de](mailto:info@maytoni.de)

**Phone:** +49 (30) 555 722 45

**Address:**

Feldstiege 98  
48161 Münster  
Germany