Product Information Sheet


COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

sources			o 13 With regula to energ	B) 1450 8 01 118.110		
Supplier's name	e or trade mark:	Lucide				
Supplier's address: Lucide NV, Bisschoppenhoflaan 145, 2100 Deurne, BE Model identifier: 77288-03-31						
Lighting techno	logy used:	LED	Non-directional or directional:	DLS		
Light source cap-type (or other electric interface)		rechargeable integrated LED wall lamp				
Mains or non-mains:		NMLS	Connected light source (CLS):	Yes		
Colour-tuneable light source:		No	Envelope:	-		
High luminance light source:		No				
Anti-glare shield:		No	Dimmable:	No		
Product parameters						
Parameter Value			Parameter	Value		
General product parameters:						
Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer		2	Energy efficiency class	F		
Useful luminous flux (фuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		160 in Nar- row cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000		
On-mode power (P _{on}), expressed in W		2,0	Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal	0,00		
Networked standby power (P _{net}) for CLS, expressed in W and rounded to the second decimal		0,00	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	80		
Outer dimen-	Height	110	Spectral power dis-	See image		
sions without	Width	360	tribution in the	in last page		
separate con- trol gear, light-		110	range 250 nm to 800 nm, at full-load			

ing control parts and non-lighting control trol parts, if any (millimetre)						
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-			
		Chromaticity coordi-	0,417			
		nates (x and y)	0,392			
Parameters for directional light sources:						
Peak luminous intensity (cd)	769	Beam angle in degrees, or the range of beam angles that can be set	120			
Parameters for LED and OLED light sources:						
R9 colour rendering index value	19	Survival factor	0,90			
the lumen maintenance factor	0,95					

(a)_{'-'}: not applicable;

(b)_{'-'} : not applicable;

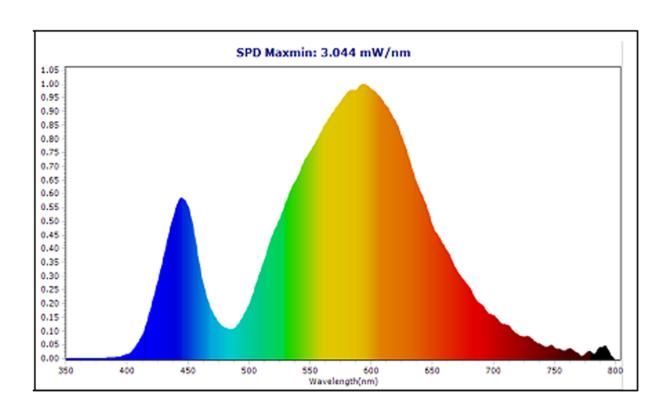

Model placed on the Union market from 10/11/2023



EPREL registration number: 1841013 https://eprel.ec.europa.eu/qr/18

41013

Supplier: Lucide (Importer) Website: www.lucide.be

Customer care service:

Name: Lucide NV Website: www.lucide.com

Email: info@lucide.com Phone: +3233662204

Address:

Bisschoppenhoflaan 145

2100 Deurne Belgium