## **Product Information Sheet**


COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

sources	recorded Record	-A11014 (20) 2013/2	oto with regard to energ	gy labelling of light		
Supplier's name or trade mark: Lucide						
Supplier's address: Lucide NV, Bisschoppenhoflaan 145, 2100 Deurne, BE  Model identifier: 77289-03-31						
Lighting techno	logy used:	LED	Non-directional or directional:	DLS		
Light source cap		rechargeable integrated LED wall lamp				
Mains or non-m	nains:	NMLS	Connected light source (CLS):	Yes		
Colour-tuneable		No	Envelope:	-		
High luminance		No				
Anti-glare shield	<u>::</u>	No .	Dimmable:	No		
		Product para				
Parameter		Value  General product p	Parameter .	Value		
Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer Useful luminous flux (фuse), in- dicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		160 in Nar- row cone (90°)	Energy efficiency class  Correlated colour temperature, rounded to the nearest 100 K, or the	3 000		
On-mode power (Pon), ex-		2,0	range of correlated colour temperatures, rounded to the nearest 100 K, that can be set  Standby power (P <sub>sb</sub> ),	0,00		
On-mode power (P <sub>on</sub> ), expressed in W		2,0	expressed in W and rounded to the second decimal	0,00		
Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal		0,00	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	80		
Outer dimen-	Height	110	Spectral power dis-	See image		
sions without separate con- trol gear, light-	Width Depth	360 110	tribution in the range 250 nm to 800 nm, at full-load	in last page		

ing control parts and non-lighting control trol parts, if any (millimetre)						
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-			
		Chromaticity coordi-	0,417			
		nates (x and y)	0,392			
Parameters for directional light sources:						
Peak luminous intensity (cd)	769	Beam angle in degrees, or the range of beam angles that can be set	120			
Parameters for LED and OLED light sources:						
R9 colour rendering index value	19	Survival factor	0,90			
the lumen maintenance factor	0,95					

(a)<sub>'-'</sub>: not applicable;

(b)<sub>'-'</sub> : not applicable;

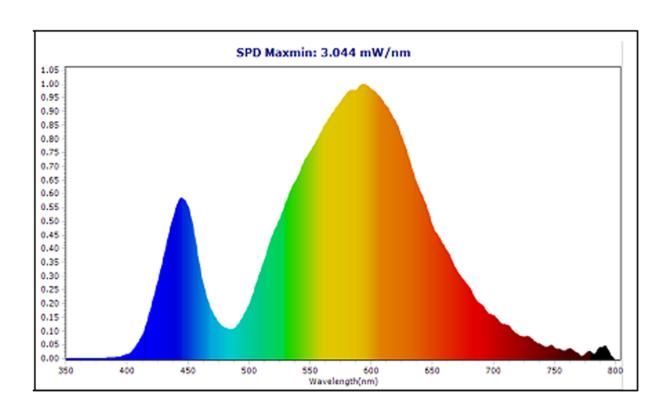

Model placed on the Union market from 10/11/2023



**EPREL registration number:** 1841016 https://eprel.ec.europa.eu/qr/18

41016

Supplier: Lucide (Importer) Website: www.lucide.be

**Customer care service:** 

Name: Lucide NV Website: www.lucide.com

Email: info@lucide.com Phone: +3233662204

Address:

Bisschoppenhoflaan 145

2100 Deurne Belgium