

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: LOOM Design

Supplier's address: Main Office, Lilleringvej 30, 8462 Aarhus Harlev, DK

Model identifier: 841-004

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	LED		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	5	Energy efficiency class	D
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	586 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	4,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	81
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,433 0,402	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	-3	Survival factor	1,00	
the lumen maintenance factor	0,50			

(a) : not applicable;

(b) : not applicable;

Lightsource Test Report

Product Information

Product Number: AP9378-1S

Submitted Unit:

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.4333$ $y=0.4024$ $u(u')=0.2490$ $v=0.3468$ $v'=0.5202$

CCT: $T_c=3048K$ ($duv=-0.00018$)

Color Ratio: $R=0.224$ $G=0.749$ $B=0.028$

Peak Wavelength: 601.5nm

Half Bandwidth: 120.2nm

Dominant Wavelength: 582.7nm

Color Purity: 0.509

CRI: $R_a=80.8$

TM30: $R_f=84$, $R_g=94$

GAI: $GAI_BB_8=91.8$, $GAI_BB_15=99.0$, $GAI_EES=53.9$



$R1=79$ $R2=91$ $R3=95$ $R4=78$ $R5=80$ $R6=89$ $R7=80$ $R8=54$

$R9=-3$ $R10=79$ $R11=78$ $R12=72$ $R13=82$ $R14=98$ $R15=71$

Color Quality Scale: $Q_a=81.2$, $Q_f=83.0$, $Q_p=81.7$, $Q_g=89.8$

$Q1=77$ $Q2=95$ $Q3=83$ $Q4=79$ $Q5=82$ $Q6=82$ $Q7=82$ $Q8=86$

$Q9=95$ $Q10=90$ $Q11=86$ $Q12=82$ $Q13=81$ $Q14=69$ $Q15=72$

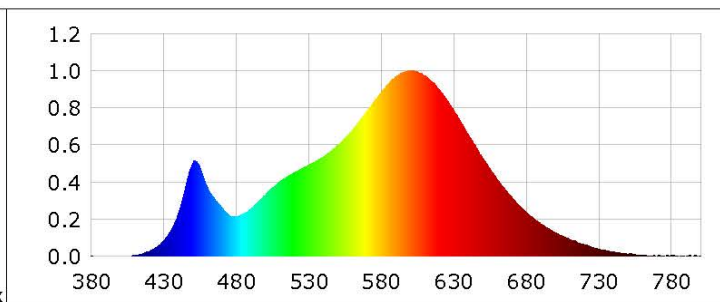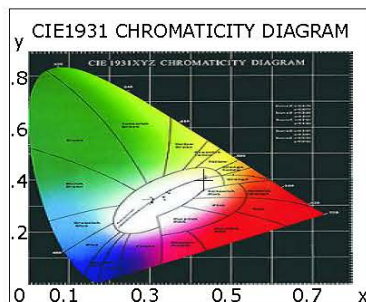

Photometric Parameters

Luminous Flux: 586.05 lm

Efficiency: 104.65 lm/W

Radiant Power: 1.739 W

EEI: 0.11

Energy Efficiency Class: A+ (EU 874-2012)

Electric Parameters

Voltage: 219.20V

Current: 0.0300A

Power: 5.60W

Power Factor: 0.8490

Frequency: 50.02Hz

Test Information

Scan Range: 380~800:1nm

Photometric Method: sphere-spectroradiometer

Stabilization Time: 0 ms ALC.: 1.0000

Photometric Condition: Sphere diameter: 1.00m, 4 π

Max of Signal: 45534 (3572)

CCD Integration Time: 320.68 ms

Condition: $T_x:28.0^{\circ}C$, $T_i:0.0^{\circ}C$, R.H.:60%

Test Lab:


Operator:

Test Device: Inventfine CMS-2S (Plus)

Test Time: 2023-09-16 10:29:20

Inspector:

Model placed on the Union market from 01/03/2024



EPREL registration number: 1950159

<https://eprel.ec.europa.eu/qr/1950159>

Supplier: Lampefeber A/S (Importer)

Website: www.lampefeber.com

Customer care service:

Name: Main Office

Website: www.loom-design.com

Email: mail@lampefeber.com

Phone: +4586361722

Address:

Lilleringvej 30
8462 Harlev
Denmark