

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: LOOM Design

Supplier's address: Main Office, Lilleringvej 30, 8462 Aarhus Harlev, DK

Model identifier: 823-001

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	COB		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	5	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	400 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	5,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	-
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90
Outer dimensions without separate control gear, light-	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,458 0,412	
Parameters for directional light sources:				
Peak luminous intensity (cd)	206	Beam angle in degrees, or the range of beam angles that can be set	108	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	65	Survival factor	0,90	
the lumen maintenance factor	0,96			

(a) '-': not applicable;

(b) '-': not applicable;


Spectrum Test Report

Sample	:		Date	:	2024-04-25 16:43:35
Specification	:	CITIZEN CLU701-1002C4 FELLOW	MINI-5W-927色	:	
Sample No.	:	G1-240201	Instrument	:	HAAS-2000(EVERFINE)
Manufacturer	:	E-LITE LIGHTING Co.,Ltd.	Test by	:	Ella
			Assessor	:	damin

Test Condition

Temperature	:	25.3Deg	RH	:	65.0%
WL Range	:	380nm-780nm	IP	:	51975 (79%)
Test Mode	:	Fast Test	T	:	517 ms
			Sensitivity	:	High

Spectrum

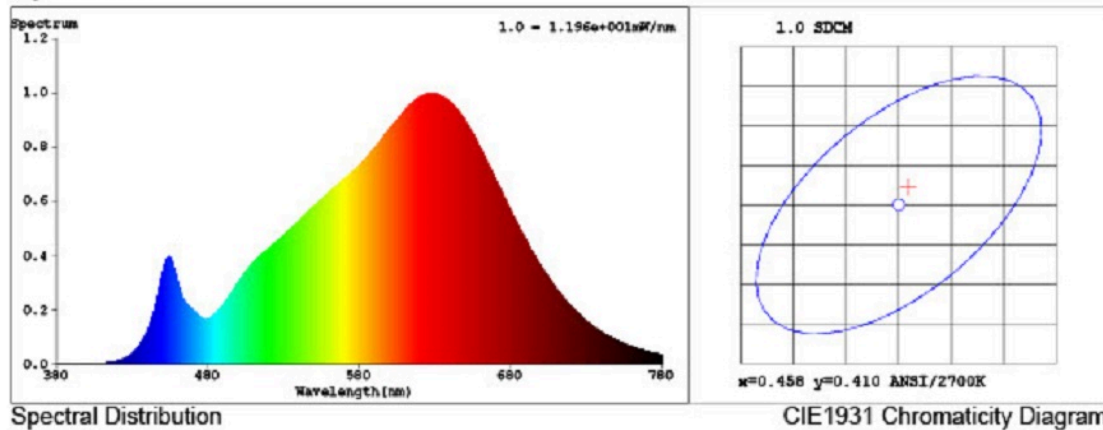

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4587$ $y = 0.4123$ / $u' = 0.2610$ $v' = 0.5278$ ($duv=7.36e-04$)

CCT= 2730K Prcp WL: Ld=583.8nm Purity=61.4%

Peak WL: Lp=629nm FWHM: =151.1nm Ratio:R=26.1% G=71.5% B=2.4%

Render Index: Ra = 93.1 AvgR = 90.3 TM30:Rf=91 Rg=99

R1 =93 R2 =96 R3 =97 R4 =93 R5 =92 R6 =95 R7 =94

R8 =84 R9 =65 R10=89 R11=94 R12=81 R13=94 R14=98 R15=90

Photometric & Radiometric Parameters


Flux = 549.09 lm Eff. : 105.14 lm/W Fe = 1.9657 W Scotopic:703.85 S/P:1.2819

Electrical parameters

V = 29.03 V I = 0.1799 A P = 5.222 W PF = 1.000 F=0.00 Hz

E-LITE LIGHTING Co.,Ltd.

Model placed on the Union market from 01/04/2024



EPREL registration number: 2011219

<https://eprel.ec.europa.eu/qr/2011219>

Supplier: Lampefeber A/S (Importer)

Website: www.lampefeber.com

Customer care service:

Name: Main Office

Website: www.loom-design.com

Email: mail@lampefeber.com

Phone: +4586361722

Address:

Lilleringvej 30
8462 Harlev
Denmark