

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** Tala

**Supplier's address:** Tala Engineering Team, 25b Vyner Street, E2 9DG London London, UK

**Model identifier:** CAND-4W-2700K-E14-NT

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E14		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

## Product parameters


Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	4	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	360 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power ( $P_{on}$ ), expressed in W	4,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	95
Outer dimensions without separate control gear, lighting control	Height	100	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	35	
	Depth	35	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	Yes	If yes, equivalent power (W)	33
		Chromaticity coordinates (x and y)	0,470 0,423
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	66	Survival factor	1,00
the lumen maintenance factor	0,90		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,90	Colour consistency in McAdam ellipses	4
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,2	Stroboscopic effect metric (SVM)	0,0

(a)-: not applicable;

(b)-: not applicable;


说明:

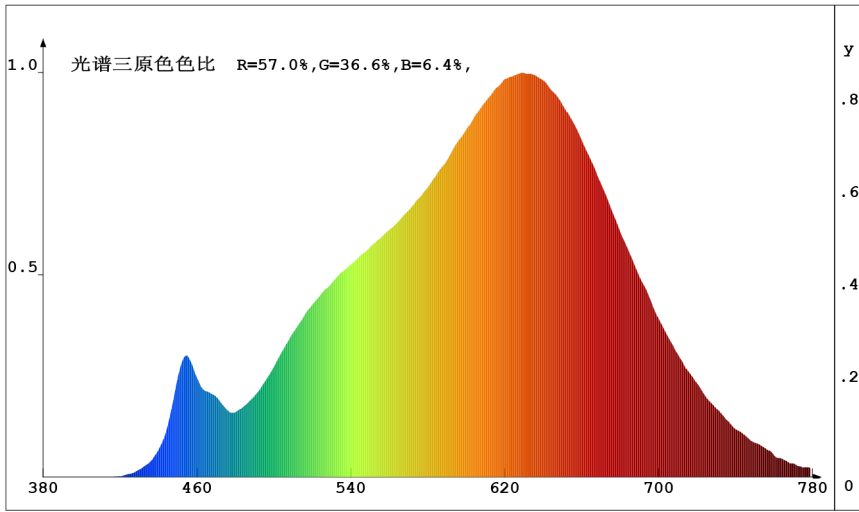

色度参数

色品坐标:  $x=0.4698$   $y=0.4233$   $u=0.2632$   $v=0.3557$   $duv=$

Model placed on the Union market from 26/04/2024



**EPREL registration number:** 2011323

<https://eprel.ec.europa.eu/qr/2011323>

**Supplier:** Tala Europe B.V. (Manufacturer)

**Website:** [eu.tala.co.uk](http://eu.tala.co.uk)

**Customer care service:**

**Name:** Tala Engineering Team

**Website:** [www.tala.co.uk](http://www.tala.co.uk)

**Email:** [engineering@tala.co.uk](mailto:engineering@tala.co.uk)

**Phone:** +44 2031501058

**Address:**

25b Vyner Street  
E2 9DG London  
United Kingdom