

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: LOOM Design

Supplier's address: Main Office, Lilleringvej 30, 8462 Aarhus Harlev, DK

Model identifier: 852-001

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	LED		
Mains or non-mains:	NMLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	12	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	347 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 684
On-mode power (P_{on}), expressed in W	12,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	0,00	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	93
Outer dimensions without separate control gear, light-	Height	1	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	10	
	Depth	11	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,462 0,412
Parameters for LED and OLED light sources:			
R9 colour rendering index value	56	Survival factor	0,98
the lumen maintenance factor	0,97		

(a) : not applicable;


(b) : not applicable;

LED Test Report

Product Mark

Product Type : admin
 Temperature : 25'C
 Operator : admin
 Remark:

Manufacturer : admin
 Humidity : 65%
 Test Date : 2024-01-29 19:27:59

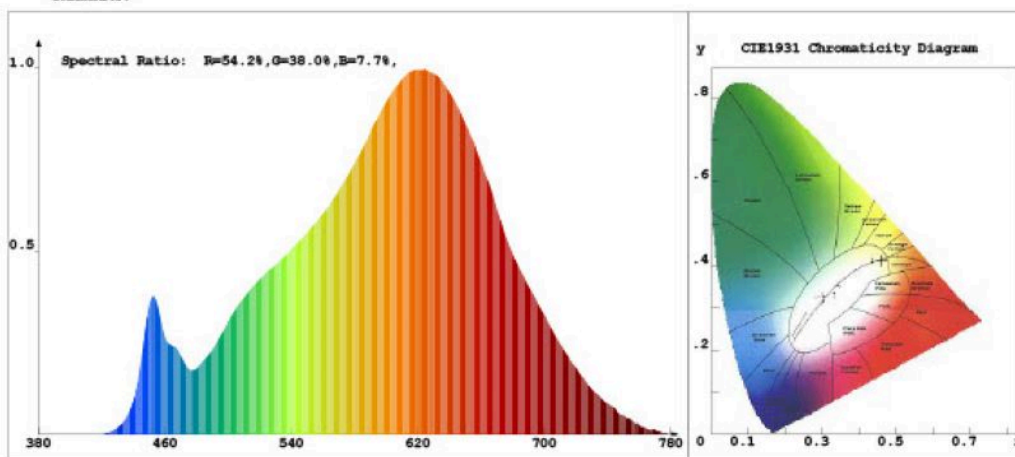

Chroma Parameters

Chro. Coord.: $x=0.4621$ $y=0.4125$ $u=0.2631$ $v=0.3523$ $duv=0.0005$
 CCT: 2684K Dominant Wave.: 584.1nm Purity: 62.5%
 Flux RGB Ratio: R=26.5%, G=72.0%, B=1.4% Peak Wave: 623.5nm Half Width: 140.0nm

Rendering Index: Ra= 92.8

R1 =93 R2 =97 R3 =98 R4 =92 R5 =92 R6 =98 R7 =91 R8 =80
 R9 =56 R10=93 R11=94 R12=85 R13=94 R14=100 R15=88

Photo Parameters

Flux: 347.74lm Effi.: 28.8lm/W Radiant: 1147.1mW Iv: 0.0mcd
 Efficiency: 0.362 Effi Level: B (IEC 62471-2012)


Ele. Parameters

Voltage: U=197.700V Current: I=0.0620A
 Power: P=12.09W Power Factor: PF=0.973

Instrument state

Instrument: Hopoo HP8000 Integral Time: 348.800ms VPeak: 14822
 VDark: 1219 Scan Range: 380-780nm Product ID: 201410718

Model placed on the Union market from 01/04/2024



EPREL registration number: 2024742

<https://eprel.ec.europa.eu/qr/2024742>

Supplier: Lampefeber A/S (Importer)

Website: www.lampefeber.com

Customer care service:

Name: Main Office

Website: www.loom-design.com

Email: mail@lampefeber.com

Phone: +4586361722

Address:

Lilleringvej 30
8462 Harlev
Denmark