

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: GLOBO Handels GmbH

Supplier's address: GLOBO Handels GmbH, Gewerbestraße 3, 9184 St. Peter, AT

Model identifier: 48034-50

Type of light source:

| | | | |
|---|--------------------------------|---------------------------------|------|
| Lighting technology used: | LED | Non-directional or directional: | NDLS |
| Light source cap-type (or other electric interface) | connection by couple connector | | |
| Mains or non-mains: | MLS | Connected light source (CLS): | No |
| Colour-tuneable light source: | No | Envelope: | - |
| High luminance light source: | No | | |
| Anti-glare shield: | No | Dimmable: | No |

Product parameters

| Parameter | Value | Parameter | Value |
|--|------------------------|--|---|
| General product parameters: | | | |
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer | 50 | Energy efficiency class | F |
| Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 4 700 in Sphere (360°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 3 000 |
| On-mode power (P_{on}), expressed in W | 50,0 | Standby power (P_{sb}), expressed in W and rounded to the second decimal | 0,00 |
| Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal | - | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set | 82 |
| Outer dimensions without separate control gear, lighting control | Height | 730 | Spectral power distribution in the range 250 nm to 800 nm, at full-load |
| | Width | 350 | |
| | Depth | 70 | |
| | | | See image in last page |

| | | | |
|---|------|---------------------------------------|----------------|
| parts and non-lighting control parts, if any (millimetre) | | | |
| Claim of equivalent power ^(a) | - | If yes, equivalent power (W) | - |
| | | Chromaticity coordinates (x and y) | 0,440 0,403 |
| Parameters for LED and OLED light sources: | | | |
| R9 colour rendering index value | 13 | Survival factor | 0,90 |
| the lumen maintenance factor | 0,95 | | |
| Parameters for LED and OLED mains light sources: | | | |
| displacement factor (cos ϕ_1) | 0,98 | Colour consistency in McAdam ellipses | 1 |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | -(b) | If yes then replacement claim (W) | - |
| Flicker metric (Pst LM) | 0,1 | Stroboscopic effect metric (SVM) | 0,1 |

(a)-: not applicable;

(b)-: not applicable;

Lightsource Test Report


Product Information

Product Type: LD

Product Number: 247

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.4350$ $y=0.3969$ $u(u')=0.2524$ $v=0.3455$ $v'=0.5183$
 CCT: $T_c=2974K$ ($duv=-0.00261$) Color Ratio: $R=0.236$ $G=0.735$ $B=0.029$
 Peak Wavelength: 604.7nm Half Bandwidth: 122.0nm
 Dominant Wavelength: 583.9nm Color Purity: 0.497
 Central Wave: 595.4nm Gravity Wave: 598.6nm
 CRI: $R_a=84.3$ TM30: $R_f=86$, $R_g=96$
 GAI: $GAI_BB_8=100.4$, $GAI_BB_15=107.0$, $GAI_EES=56.9$
 R1 =84 R2 =94 R3 =94 R4 =83 R5 =85 R6 =94 R7 =81 R8 =60
 R9 =13 R10=87 R11=83 R12=79 R13=87 R14=98 R15=76
 Color Quality Scale: $Q_a=83.7$, $Q_f=85.0$, $Q_p=86.0$, $Q_g=92.8$
 Q1 =79 Q2 =95 Q3 =85 Q4 =82 Q5 =85 Q6 =86 Q7 =85 Q8 =86
 Q9 =95 Q10=91 Q11=87 Q12=84 Q13=83 Q14=74 Q15=75

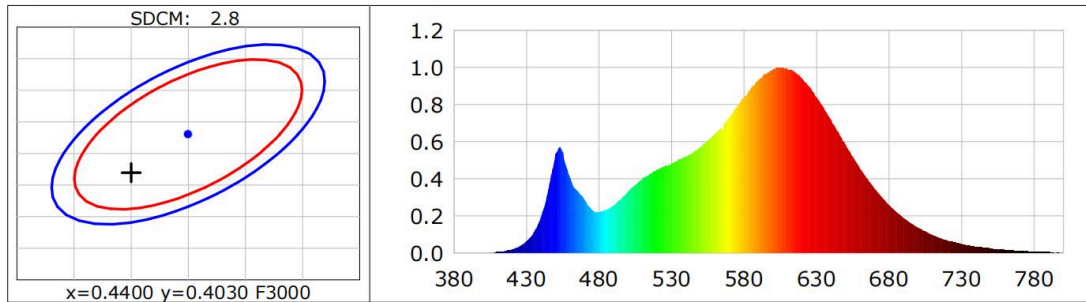

Photometric Parameters

Luminous Flux: 4769.0 lm Efficiency: 90.46 lm/W Radiant Power: 14.643 W
 Total mains efficacy: 90.46 lm/W Energy Efficiency Class: F (EU 2019/2015)

Electric Parameters

Voltage: 229.30V Current: 0.2430A Power: 52.72W
 Power Factor: 0.9470 Frequency: 49.99Hz


Test Information

Scan Range: 380~800:1nm Photometric Method: sphere-spectroradiometer
 Stabilization Time: 0 Sec ALC.: 1.0000 Photometric Condition: Sphere diameter: 1.50m, 4T
 Max of Signal: 44612 (3817) CCD Integration Time: 134.54 ms

Condition: Tx:28.8°C, Ti:25.5°C, R.H.:60%
 Test Lab:
 Operator:

Test Device: CMS-2S (Plus)
 Test Time: 2024-04-22 16:02:58
 Inspector:

Model placed on the Union market from 24/05/2024



EPREL registration number: 2035564

<https://eprel.ec.europa.eu/qr/2035564>

Supplier: Globo Handels GmbH (Manufacturer)

Website:

Customer care service:

Name: GLOBO Handels GmbH

Website:

Email: office@globo-lighting.com

Phone: +43425332050

Address:

Gewerbestraße 3
9184 St. Peter
Austria