

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** LOOM Design

**Supplier's address:** Main Office, Lilleringvej 30, 8462 Aarhus Harlev, DK

**Model identifier:** 854-003

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	LED		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

## Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

### General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	12	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	314 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power ( $P_{on}$ ), expressed in W	11,4	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90
Outer dimensions without separate control gear, light-	Height	78	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	1	
	Depth	120	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,462 0,415
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	58	Survival factor	0,99
the lumen maintenance factor	0,96		

(a) : not applicable;

(b) : not applicable;



## Lightsource Test Report

**Product Infomation**


Product Type: 854-001  
 Product Number: 21

Product Spec: 854-001

**CIE Colorimetric Parameters**

Chromaticity coordinates:  $x=0.4617$   $y=0.4148$   $u(u')=0.2618$   $v=0.3528$   $v'=0.5292$   
 CCT:  $T_c=2707K$  ( $duv=0.00140$ ) Color Ratio:  $R=0.261$   $G=0.719$   $B=0.019$   
 Peak Wavelength: 625.4nm Half Bandwidth: 150.6nm  
 Dominant Wavelength: 583.7nm Color Purity: 0.631  
 CRI:  $R_a=91.0$ ,  $avgR(1\sim14)=87.7$ ,  $avgR(1\sim15)=87.7$  TM30:  $R_f=90$ ,  $R_g=101$   
 GAI:  $GAI_{BB\_8}=95.2$ ,  $GAI_{BB\_15}=99.7$ ,  $GAI_{EES}=46.5$

R1 =91	R2 =93	R3 =94	R4 =93	R5 =91	R6 =92	R7 =93	R8 =82
R9 =57	R10=83	R11=93	R12=78	R13=92	R14=96	R15=87	
Color Quality Scale: $Q_a=89.2$ , $Q_f=91.2$ , $Q_p=91.8$ , $Q_g=96.1$							
Q1 =86	Q2 =96	Q3 =87	Q4 =88	Q5 =89	Q6 =87	Q7 =88	Q8 =92
Q9 =96	Q10=92	Q11=92	Q12=92	Q13=92	Q14=86	Q15=86	

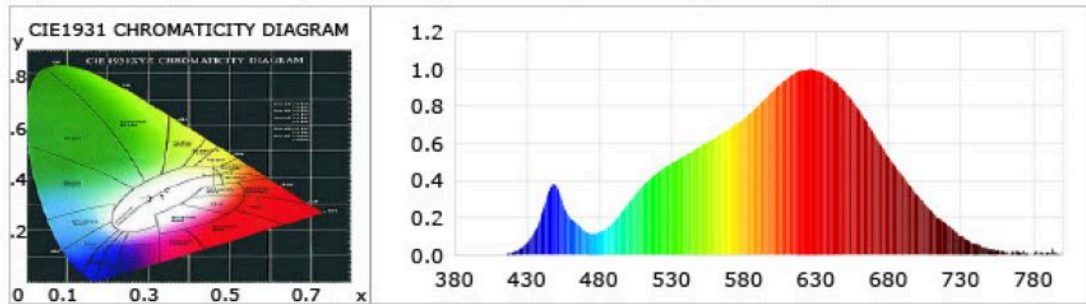

**Photometric Parameters**

Luminous Flux: 314.09 lm  
 EEI: 0.37  
 Pupil Flux: 369.14 Plm

Efficiency: 27.19 lm/W  
 Energy Efficiency Class: B (EU 874-2012)  
 Pupil Lumens Per Watt: 31.96 Plm/W

Radiant Power: 1.075 W  
 Pupil Factor (Kp): 1.175

**Electric Parameters**

Voltage: 220.60V  
 Power Factor: 0.9960

Current: 0.0530A  
 Frequency: 49.99Hz

Power: 11.55W

**Test Infomation**


Scan Range: 380~800:1nm  
 Stabilization Time: 1 Min ALC.: 1.0000  
 Max of Signal: 31637 (2228)

Photometric Method: sphere-spectroradiometer  
 Photometric Condition: Sphere diameter: 1.50m, 4π  
 CCD Integration Time: 1000.00 ms

Condition:  $T_x:17.9^{\circ}C$ ,  $T_i:14.9^{\circ}C$ , R.H.:60%  
 Test Lab:  
 Operator: CHEN

Test Device: Inventfine CMS-2S (Plus)  
 Test Time: 2024-01-23 17:21:23  
 Inspector:

Model placed on the Union market from 01/07/2024



**EPREL registration number:** 2069752

<https://eprel.ec.europa.eu/qr/2069752>

**Supplier:** Lampefeber A/S (Importer)

**Website:** [www.lampefeber.com](http://www.lampefeber.com)

**Customer care service:**

**Name:** Main Office

**Website:** [www.loom-design.com](http://www.loom-design.com)

**Email:** [mail@lampefeber.com](mailto:mail@lampefeber.com)

**Phone:** +4586361722

**Address:**

Lilleringvej 30  
8462 Harlev  
Denmark