Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's address: Lucide NV, Bisschoppenhoflaan 145, 2100 Deurne, BE

Model identifier: 44517-08-41


| Type of light source | Type | of light | source: |
|----------------------|------|----------|---------|
|----------------------|------|----------|---------|

ing control

| Lighting techno | logy used: | LED | Non-directional or directional: | NDLS |
|----------------------------------------|-----------------------------------------------------------------------|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| Light source cap | o-type | Integrated LED | | |
| (or other electri | ic interface) | table lamp | | |
| Mains or non-m | nains: | NMLS | Connected light source (CLS): | No |
| Colour-tuneable | e light source: | No | Envelope: | - |
| High luminance | light source: | No | | |
| Anti-glare shield | d: | No | Dimmable: | Yes |
| | | Product para | meters | I |
| Parameter | | Value | Parameter | Value |
| | | General product p | parameters: | |
| ٠, | mption in on- 00 h), rounded st integer | 9 | Energy efficiency class | G |
| dicating if it refe a sphere (360°) | s flux (фuse), ineers to the flux in, in a wide cone arrow cone (90º) | 200 in Nar- row cone (90°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 2 700 |
| On-mode pov pressed in W | ver (P _{on}), ex- | 9,5 | Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal | 0,00 |
| (P _{net}) for CLS, o | tandby power expressed in W the second dec- | - | Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set | 80 |
| Outer dimen- | Height | 2 | Spectral power dis- | See image |
| sions without | Width | 90 | tribution in the | in last page |
| separate control gear, light- | Depth | 90 | range 250 nm to 800 nm, at full-load | |

| parts and non- lighting con- trol parts, if any (millime- tre) | | | | | |
|----------------------------------------------------------------------------|------|------------------------------|-------|--|--|
| Claim of equivalent power ^(a) | - | If yes, equivalent power (W) | - | | |
| | | Chromaticity coordi- | 0,463 | | |
| | | nates (x and y) | 0,420 | | |
| Parameters for LED and OLED light sources: | | | | | |
| R9 colour rendering index value | 52 | Survival factor | 0,90 | | |
| the lumen maintenance factor | 0,97 | | | | |

(a)'-': not applicable; (b)'-': not applicable;

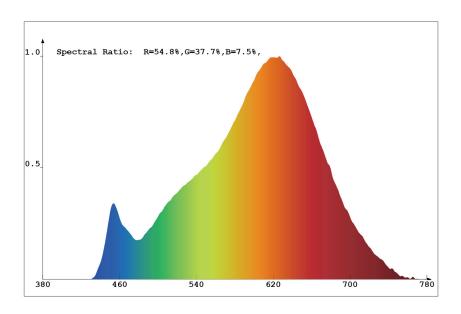

Model placed on the Union market from 02/08/2024



EPREL registration number: 2097260 https://eprel.ec.europa.eu/qr/20

97260

Supplier: Lucide N.V. (Importer) Website: www.lucide.be

Customer care service:

Name: Lucide NV Website: www.lucide.com

Email: info@lucide.com Phone: +3233662204

Address:

Bisschoppenhoflaan 145

2100 Deurne Belgium