

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: GLOBO Handels GmbH

Supplier's address: GLOBO Handels GmbH, Gewerbestraße 3, 9184 St. Peter, AT

Model identifier: 416080WD4R-CCT

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	no		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	Yes	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	40	Energy efficiency class	E
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	5 349 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2700...6500
On-mode power (P_{on}), expressed in W	40,6	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,50
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	338	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	17	
	Depth	1	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,428 0,401
Parameters for LED and OLED light sources:			
R9 colour rendering index value	-2	Survival factor	1,00
the lumen maintenance factor	0,96		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,00	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,4

(a)-: not applicable;

(b)-: not applicable;

Lightsource Test Report (1/2)

Product Information

Product Number: 416080WD4R-CCT裸

Submitted Unit: p


CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.4281$ $y=0.4007$ $u(u')=0.2463$ $v=0.3458$ $v'=0.5187$
 CCT: $T_c=3126K$ ($duv=-0.00008$) Color Ratio: $R=0.218$ $G=0.758$ $B=0.024$
 Peak Wavelength: 599.5nm Half Bandwidth: 130.9nm
 Dominant Wavelength: 582.3nm Color Purity: 0.488
 CRI: $R_a=80.5$ TM30: $R_f=82$, $R_g=97$
 GAI: $GAI_BB_8=94.1$, $GAI_BB_15=99.0$, $GAI_EES=57.2$

R1 =78	R2 =88	R3 =96	R4 =80	R5 =79	R6 =85	R7 =82	R8 =57
R9 =-2	R10=73	R11=79	R12=68	R13=80	R14=98	R15=71	

 Color Quality Scale: $Q_a=80.3$, $Q_f=81.6$, $Q_p=82.0$, $Q_g=92.0$

Q1 =76	Q2 =97	Q3 =80	Q4 =78	Q5 =81	Q6 =81	Q7 =81	Q8 =85
Q9 =96	Q10=87	Q11=84	Q12=81	Q13=81	Q14=69	Q15=71	

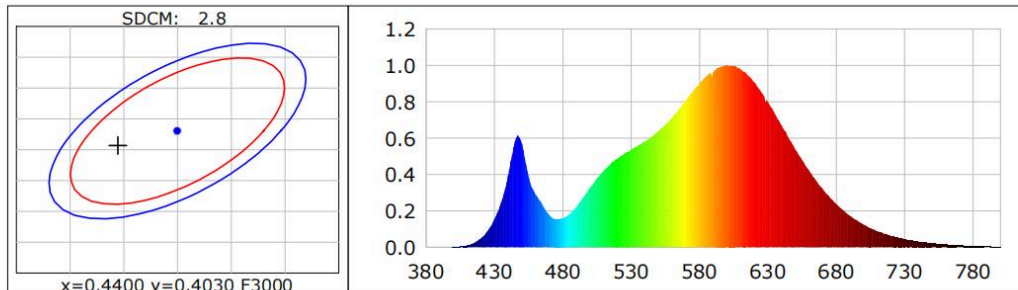

Photometric Parameters

Luminous Flux: 5349.10 lm Efficiency: 131.59 lm/W Radiant Power: 17.931 W
 Total mains efficacy: 131.59 lm/W Energy Efficiency Class: E (EU 2019/2015)
 Pupil Flux: 7654.67 Plm Pupil Lumens Per Watt: 179.48 Plm/W Pupil Factor (Kp): 1.265

Electric Parameters

Voltage: 232.20V Current: 0.1920A Power: 40.65W
 Power Factor: 0.9580 Frequency: 49.99Hz

Test Information


Scan Range: 380~800:1nm
 Stabilization Time: 0 ms ALC.: 1.0000
 Max of Signal: 46510 (1935)

Photometric Method: sphere-spectroradiometer
 Photometric Condition: Sphere diameter: 1.50m, 4T
 CCD Integration Time: 87.32 ms

Condition: $T_x:18.8^{\circ}C$, $T_i:19.9^{\circ}C$, R.H.:60%
 Test Lab:
 Operator:

Test Device: Inventfine CMS-2S (Plus)
 Test Time: 2021-12-20 18:29:29
 Inspector:

Model placed on the Union market from 30/11/2023



EPREL registration number: 2106007

<https://eprel.ec.europa.eu/qr/2106007>

Supplier: Globo Handels GmbH (Importer)

Website:

Customer care service:

Name: GLOBO Handels GmbH

Website:

Email: office@globo-lighting.com

Phone: +43425332050

Address:

Gewerbestraße 3
9184 St. Peter
Austria