

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: LOOM Design

Supplier's address: Main Office, Lilleringvej 30, 8462 Aarhus Harlev, DK

Model identifier: 855-003

Type of light source:

| | | | |
|---|------|---------------------------------|----------------------------|
| Lighting technology used: | LED | Non-directional or directional: | NDLS |
| Light source cap-type (or other electric interface) | LED | | |
| Mains or non-mains: | NMLS | Connected light source (CLS): | No |
| Colour-tuneable light source: | No | Envelope: | - |
| High luminance light source: | No | | |
| Anti-glare shield: | No | Dimmable: | Only with specific dimmers |

Product parameters

| Parameter | Value | Parameter | Value |
|-----------|-------|-----------|-------|
|-----------|-------|-----------|-------|

General product parameters:

| | | | |
|--|----------------------|--|---|
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer | 14 | Energy efficiency class | G |
| Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 800 in Sphere (360°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 2 700 |
| On-mode power (P_{on}), expressed in W | 13,6 | Standby power (P_{sb}), expressed in W and rounded to the second decimal | 0,00 |
| Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal | - | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set | 90 |
| Outer dimensions without separate control gear, light- | Height | 1 800 | Spectral power distribution in the range 250 nm to 800 nm, at full-load |
| | Width | 1 800 | |
| | Depth | 140 | |
| | | | See image in last page |

| | | | |
|---|------|------------------------------------|----------------|
| ing control parts and non-lighting control parts, if any (millimetre) | | | |
| Claim of equivalent power ^(a) | - | If yes, equivalent power (W) | - |
| | | Chromaticity coordinates (x and y) | 0,459 0,415 |
| Parameters for LED and OLED light sources: | | | |
| R9 colour rendering index value | 58 | Survival factor | 0,96 |
| the lumen maintenance factor | 0,96 | | |

(a) : not applicable;

(b) : not applicable;



Lightsource Test Report

Product Information


Product Type: 855-001
Product Number: 4

Product Spec: 855-001

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.4591$ $y=0.4151$ $u(u')=0.2600$ $v=0.3526$ $v'=0.5289$
 CCT: $T_c=2745K$ ($duv=0.00172$) Color Ratio: $R=0.259$ $G=0.720$ $B=0.022$
 Peak Wavelength: 624.0nm Half Bandwidth: 152.3nm
 Dominant Wavelength: 583.4nm Color Purity: 0.625
 CRI: $R_a=91.9$, $avgR(1\sim14)=89.0$, $avgR(1\sim15)=88.9$ TM30: $R_f=92$, $R_g=100$
 GAI: $GAI_{BB_8}=93.1$, $GAI_{BB_15}=97.7$, $GAI_{EES}=46.5$

| | | | | | | | |
|--|--------|--------|--------|--------|--------|--------|--------|
| R1 =92 | R2 =94 | R3 =96 | R4 =93 | R5 =92 | R6 =94 | R7 =92 | R8 =82 |
| R9 =57 | R10=87 | R11=95 | R12=82 | R13=92 | R14=97 | R15=87 | |
| Color Quality Scale: $Q_a=90.6$, $Q_f=92.8$, $Q_p=92.4$, $Q_g=95.0$ | | | | | | | |
| Q1 =88 | Q2 =96 | Q3 =90 | Q4 =90 | Q5 =91 | Q6 =90 | Q7 =91 | Q8 =93 |
| Q9 =97 | Q10=94 | Q11=93 | Q12=93 | Q13=92 | Q14=86 | Q15=86 | |

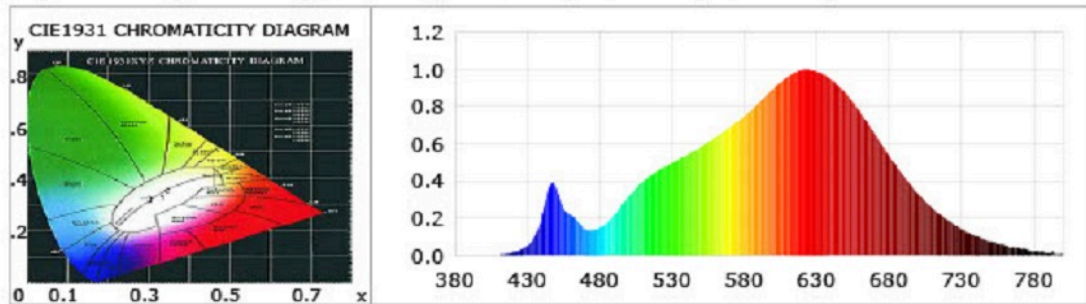

Photometric Parameters

Luminous Flux: 796.36 lm
EEI: 0.21
Pupil Flux: 958.65 Plm

Efficiency: 58.69 lm/W
Energy Efficiency Class: A (EU 874-2012)
Pupil Lumens Per Watt: 70.64 Plm/W

Radiant Power: 2.770 W
Pupil Factor (Kp): 1.204

Electric Parameters

Voltage: 220.40V
Power Factor: 0.9620

Current: 0.0640A
Frequency: 49.99Hz

Power: 13.57W

Test Information

Scan Range: 380~800:1nm
Stabilization Time: 1 Min ALC.: 1.0000
Max of Signal: 45947 (1969)

Photometric Method: sphere-spectroradiometer
Photometric Condition: Sphere diameter: 1.50m, 4T
CCD Integration Time: 576.27 ms

Condition: $T_x:16.9^{\circ}C$, $T_i:14.8^{\circ}C$, R.H.:60%
Test Lab:
Operator: CHEN

Test Device: Inventfine CMS-2S (Plus)
Test Time: 2024-01-23 13:55:54
Inspector:

Model placed on the Union market from 22/08/2024



EPREL registration number: 2106908

<https://eprel.ec.europa.eu/qr/2106908>

Supplier: Lampefeber A/S (Importer)

Website: www.lampefeber.com

Customer care service:

Name: Main Office

Website: www.loom-design.com

Email: mail@lampefeber.com

Phone: +4586361722

Address:

Lilleringvej 30
8462 Harlev
Denmark