

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: GLOBO Handels GmbH

Supplier's address: GLOBO Handels GmbH, Gewerbestraße 3, 9184 St. Peter, AT

Model identifier: 16024TW

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	LED		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	6	Energy efficiency class	E
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	740 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	5,5	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,50
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	81
Outer dimensions without separate control gear, lighting control	Height	150	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	150	
	Depth	325	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,366 0,369
Parameters for LED and OLED light sources:			
R9 colour rendering index value	3	Survival factor	0,90
the lumen maintenance factor	0,95		

(a) : not applicable;

(b) : not applicable;


Spectral test report for lamp

Product type : 16024T-4000K Light source
 Product No. :
 Manufacturer :TAVIC

Test time : 2024/7/29 10:30:59
 Test equipment : SPEC-3000A Spectrometer
 Operator : 林溢

CIE Color Parameter

Chromaticity coordinates: $x=0.3711$ $y=0.3762$ $u=0.2192$ $v=0.3333$ $u^*=0.2192$ $v^*=0.5000$
 Color temperature: 4260 K (duv=+0.00262) Color difference: SDCM(IEC/F3000)=36.5 Main Wl: $\lambda_d=485.2$ nm Purity: 0.191
 Peak wavelength: $\lambda_p=449.0$ FWHM: $\Delta\lambda_p=23.4$ nm Color ratio: R=0.184 G=0.783 B=0.033
 Color rendering index :Ra=80.43 Color Fidelity:Rf=82.62 Color GamutRg=94.12 GAI=88.63
 R1=77.9 R2=86.2 R3=93.1 R4=80.0 R5=78.4 R6=81.1 R7=85.5 R8=61.4
 R9=-4.9 R10=67.7 R11=78.6 R12=58.4 R13=80.5 R14=96.3 R15=71.1

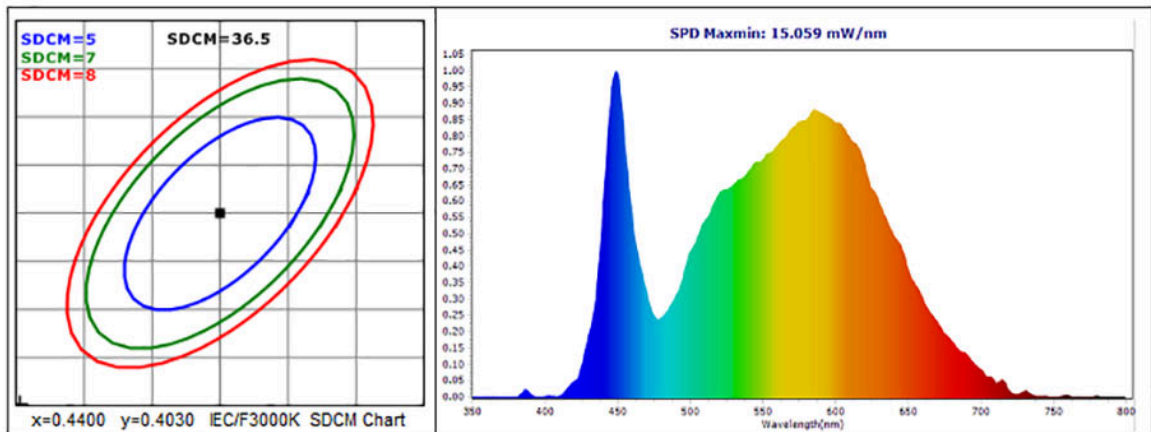

Optical Parameter

Luminous flux: 770.4 lm
 Energy efficiency index(EEI): 121.323
 MOVE=747.202 MES1=661.102
 luminous efficiency:121.32 lm/w
 Energy efficiency class:E (EU 2019/2015) (EU 874)
 Radiant flux: 2.272 W

Electrical Parameter

Voltage(V): 230.29 Current(A): 0.0350 Watte(W): 6.350 Power factor: 0.7878


Test Infomation

Temperature :Deg C Humidity :
 Test range :350-800nm : 1nm Peak AD. :46603 (71.1%)
 Preheat time :0(min) Integral time. :2635.05 (ms)

MEASUREFINE

Hangzhou HuiPu Instrument Co., Ltd. <http://www.measurefine.com>

Model placed on the Union market from 01/08/2024



EPREL registration number: 2120525

<https://eprel.ec.europa.eu/qr/2120525>

Supplier: Globo Handels GmbH (Importer)

Website:

Customer care service:

Name: GLOBO Handels GmbH

Website:

Email: office@globo-lighting.com

Phone: +43425332050

Address:

Gewerbestraße 3
9184 St. Peter
Austria