

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: GLOBO Handels GmbH

Supplier's address: GLOBO Handels GmbH, Gewerbestraße 3, 9184 St. Peter, AT

Model identifier: 16024-3DW

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	LED		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	18	Energy efficiency class	E
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	2 200 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	17,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,50
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,380 0,380	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	9	Survival factor	0,90	
the lumen maintenance factor	0,95			

(a) : not applicable;

(b) : not applicable;

Spectral test report for lamp


Product type : 16024-3D
Product No. :
Manufacturer : TAVIC

Test time : 2024/10/20 15:21:37
Test equipment : SPEC-3000A Spectrometer
Operator : L

CIE Color Parameter

Chromaticity coordinates: $x=0.3740$ $y=0.3723$ $u=0.2226$ $v=0.3324$ $u^*=0.2226$ $v^*=0.4986$
Color temperature: 4151 K ($duv=-0.00016$) Color difference: SDCM(IEC/F4000)=3.1 Main Wavelength: 484.1 nm Purity: 0.187
Peak wavelength: $\lambda_p=449.4$ nm FWHM: $\Delta\lambda_p=26.4$ nm Color ratio: R=0.193 G=0.773 B=0.034

Color rendering index: Ra=82.9 Color Fidelity: Rf=83.93 Color Gamut: Rg=95.86 GAI=93.32
R1=81.2 R2=88.4 R3=93.8 R4=82.5 R5=81.6 R6=83.9 R7=86.3 R8=65.4
R9=8.5 R10=72.5 R11=81.5 R12=64.4 R13=83.5 R14=96.6 R15=75.5

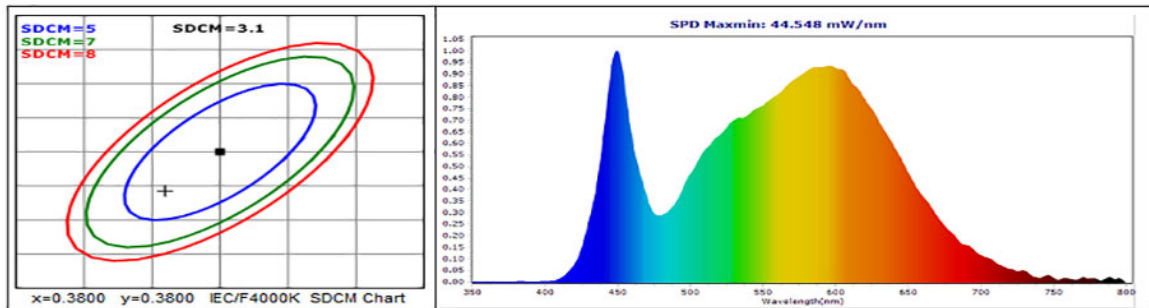

Optical Parameter

Luminous flux: 2226.3 lm
Energy efficiency index (EEI): 133.856
MOVE=2155.668 MES1=1907.527

luminous efficiency: 133.86 lm/w Radiant flux: 6.803 W
Energy efficiency class: E (EU 2019/2015) (EU 874)

Electrical Parameter

Voltage(V): 37.20 Current(A): 0.4471 Watts(W): 16.632 Power factor: 1.0000

Test Information


Temperature : 25.0 Deg C
Test range : 350-800nm : 1nm
Preheat time : 0.1(min)

Humidity : 65%
Peak AD : 49085 (74.9%)
Integral time : 1550.08 (ms)

MEASUREFINE

Hangzhou Huipu Instrument Co., Ltd. <http://www.measurefine.com>

Model placed on the Union market from 16/08/2024



EPREL registration number: 2120535

<https://eprel.ec.europa.eu/qr/2120535>

Supplier: Globo Handels GmbH (Importer)

Website:

Customer care service:

Name: GLOBO Handels GmbH

Website:

Email: office@globo-lighting.com

Phone: +43425332050

Address:

Gewerbestraße 3
9184 St. Peter
Austria