

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: GLOBO Handels GmbH

Supplier's address: GLOBO Handels GmbH, Gewerbestraße 3, 9184 St. Peter, AT

Model identifier: 48468-42

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	LED		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	42	Energy efficiency class	E
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	5 100 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700 or 4 000 or 6 500
On-mode power (P_{on}), expressed in W	42,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,30
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	84
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,461 0,415	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	14	Survival factor	0,90	
the lumen maintenance factor	0,96			

(a) : not applicable;

(b) : not applicable;

1862LED-X-15W2724-CI45031R90-YML600 Lightsource Test Report

Product Information

Product Type: 48468-42
Product Number: 8

Product Spec: 2700K 100%亮度

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.4613$ $y=0.4152$ $u(u')=0.2614$ $v=0.3529$ $v'=0.5293$

CCT: $T_c=2716K$ ($duv=0.00157$)

Peak Wavelength: 606.0nm

Dominant Wavelength: 583.6nm

CRI: $R_a=84.0$

Color Ratio: $R=0.251$ $G=0.726$ $B=0.023$

Half Bandwidth: 119.8nm

Color Purity: 0.631

TM30: $R_f=86$, $R_g=94$

$R_1=82$

$R_2=92$

$R_3=96$

$R_4=83$

$R_5=83$

$R_6=93$

$R_7=82$

$R_8=60$

$R_9=14$

$R_{10}=83$

$R_{11}=83$

$R_{12}=77$

$R_{13}=85$

$R_{14}=98$

$R_{15}=74$

Color Quality Scale: $Q_a=84.5$, $Q_f=87.0$, $Q_p=84.5$, $Q_g=89.0$

$Q_1=79$

$Q_2=93$

$Q_3=88$

$Q_4=84$

$Q_5=85$

$Q_6=86$

$Q_7=86$

$Q_8=89$

$Q_9=94$

$Q_{10}=93$


$Q_{11}=90$

$Q_{12}=87$

$Q_{13}=85$

$Q_{14}=74$

$Q_{15}=76$

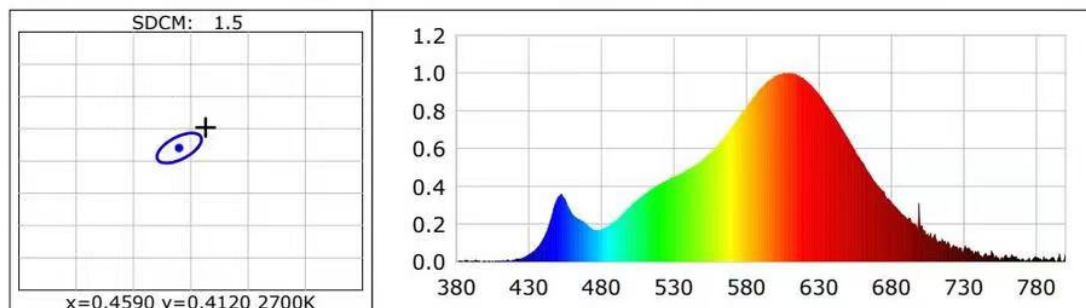

Photometric Parameters

Luminous Flux: 2274.24 lm
EEI: 0.25

Efficiency: 54.26 lm/W

Radiant Power: 7.060 W

Energy Efficiency Class: B (EU 874-2012)

Electric Parameters

Voltage: 231.30V

Power Factor: 0.9460

Current: 0.1910A

Frequency: 49.99Hz

Power: 41.91W

Test Information

Scan Range: 380~800:1nm

Stabilization Time: 0 Sec

Max of Signal: 43320 (4765)

Photometric Method: sphere-spectroradiometer


Photometric Condition: Sphere diameter: 1.75m, 4 π

CCD Integration Time: 1861.30 ms

Condition: $T_x:34.0^{\circ}C$, $T_i:29.7^{\circ}C$, R.H.:60%
Test Lab:
Operator:

Test Device: Inventfine CMS-2S (Plus)
Test Time: 2024-09-03 14:07:31
Inspector:

Model placed on the Union market from 03/09/2024



EPREL registration number: 2138346

<https://eprel.ec.europa.eu/qr/2138346>

Supplier: Globo Handels GmbH (Manufacturer)

Website:

Customer care service:

Name: GLOBO Handels GmbH

Website:

Email: office@globo-lighting.com

Phone: +43425332050

Address:

Gewerbestraße 3
9184 St. Peter
Austria