

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: blomus GmbH

Supplier's address: Kundenservice, Zur Hubertushalle 4, 59846 Sundern, DE

Model identifier: SPIRIT M

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	LED-Module		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	1	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	110 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700 or 4 000
On-mode power (P_{on}), expressed in W	1,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	-
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	150	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	100	
	Depth	100	
			See image in last page


parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,457 0,411
Parameters for LED and OLED light sources:			
R9 colour rendering index value	-2	Survival factor	1,00
the lumen maintenance factor	0,98		

(a) : not applicable;

(b) : not applicable;

Attachment 1: Photometric test record
 For model B-1811-S2/B-1813G-V2.0 with 2700K

Spectroradiometric Parameters

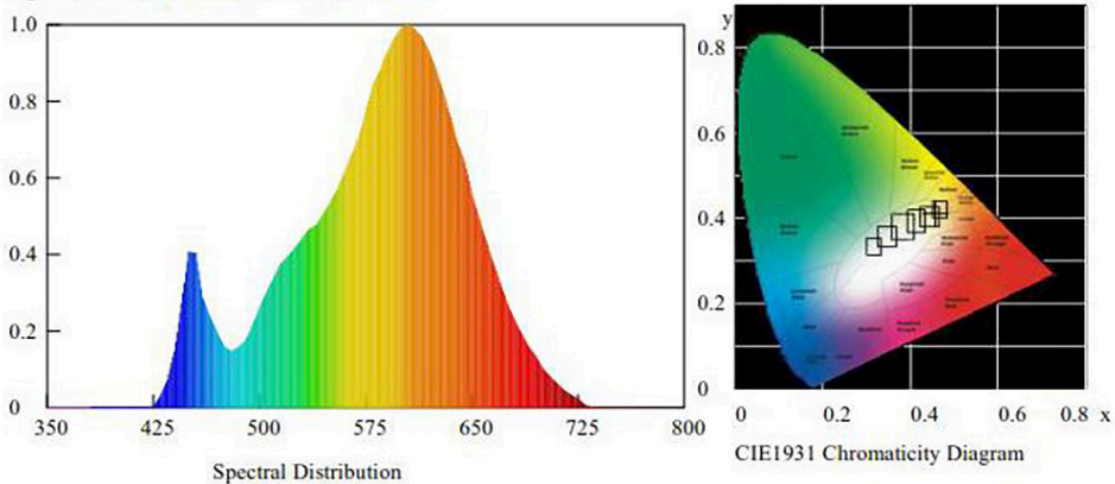


Chromaticity Coordinates: $x=0.4563$ $y=0.4108$ $u'=0.2601$ $v'=0.5269$
 Correlated Color Temperature: 2752 K Dominant Wavelength: 582.0 nm(E)
 Colour Fidelity Index: $R_f=81$ Gamut Index: $R_g=94$
 Luminous Flux: 110.83 lm Purity: 0.6068
 Chromaticity Difference: +0.00037Duv Peak Wavelength: 605.0 nm
 Color Ratio: $K_r=47.6\%$ $K_g=45.9\%$ $K_b=6.5\%$ Color Tolerance(SDCM): 1.3966
 Bandwidth: 106.2nm Radiant Flux: 0.269 W
 Photosynthetically Active Radiation(PAR): 0.27W Photosynthetic Photon Flux(PPF): 1.30 μ mol/s
 Rendering Index: $R_a=80.6$
 R1=79 R2=91 R3=95 R4=78 R5=79 R6=89 R7=80 R8=53
 R9=-2 R10=79 R11=78 R12=70 R13=83 R14=98 R15=70 Re=75

Electric Parameters

Voltage: 3.59 V Current: 0.278 A
 Power Factor: 1.000 Power: 1.00 W
 Luminous Efficacy: 110.8 lm/W

Model placed on the Union market from 01/01/2020



EPREL registration number: 2211010

<https://eprel.ec.europa.eu/qr/2211010>

Supplier: blomus GmbH (Manufacturer)

Website: www.blomus.com

Customer care service:

Name: Kundenservice

Website: blomus.com

Email: info@blomus.com

Phone: +49 (0)2933 831-600

Address:

Zur Hubertushalle 4

59846 Sundern

Germany