## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's address: The Light Group, Mjåvannsveien 175, 4628 Kristiansand, NO

Model identifier: SLC9500


_	•			
Ivpe	OΤ	light	source	

Product parameters					
Anti-glare shield:	No	Dimmable:	Yes		
High luminance light source:	Yes				
Colour-tuneable light source:	No	Envelope:	-		
Mains or non-mains:	MLS	Connected light source (CLS):	No		
(or other electric interface)					
Light source cap-type	other				
Lighting technology used:	LED	Non-directional or directional:	NDLS		

Froduct parameters						
Parameter		Value	Parameter	Value		
General product parameters:						
_ ·	mption in on- 00 h), rounded st integer	18	Energy efficiency class	E		
dicating if it refe a sphere (360º)	s flux (фuse), ineers to the flux in, in a wide cone arrow cone (90º)	2 070 in Nar- row cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000 or 4 000		
On-mode pow pressed in W	ver (P <sub>on</sub> ), ex-	18,0	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	0,00		
Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	90		
Outer dimen-	Height	74	Spectral power dis-	See image		
sions without	Width	58	tribution in the	in last page		
separate con- trol gear, light- ing control	Depth	560	range 250 nm to 800 nm, at full-load			

parts and non-					
lighting con-					
trol parts, if					
any (millime-					
tre)					
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-		
		Chromaticity coordi-	0,376		
		nates (x and y)	0,379		
Parameters for LED and OLED light sources:					
R9 colour rendering index value	53	Survival factor	1,00		
the lumen maintenance factor	0,96				
Parameters for LED and OLED m	nains light sources:				
displacement factor (cos φ1)	1,00	Colour consistency	3		
		in McAdam ellipses			
Claims that an LED light source	_(b)	If yes then replace-	-		
replaces a fluorescent light		ment claim (W)			
source without integrated bal-					
last of a particular wattage.					
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0		

(a)'-': not applicable; (b)'-': not applicable;

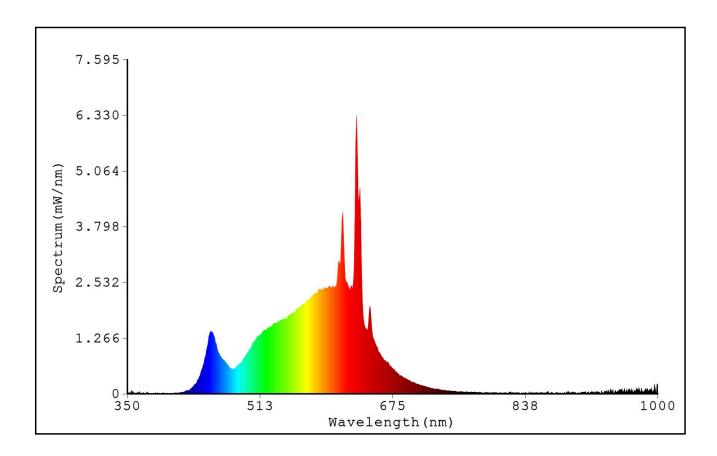

Model placed on the Union market from 01/12/2024



**EPREL registration number:** 2217006 https://eprel.ec.europa.eu/qr/22

17006

Supplier: THE LIGHT GROUP AS (Manufacturer) Website: www.tlg.no

**Customer care service:** 

Name: The Light Group Website: www.tlg.no

Email: post@tlg.no Phone: +4738002101

Address:

Mjåvannsveien 175 4628 Kristiansand

Norway