Product Information Sheet

Networked standby

imal

ing

Outer dimen-

sions without

separate con-

trol gear, light-

control

(P_{net}) for CLS, expressed in W

and rounded to the second dec-

Height

Width

Depth

power

120

58

560

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

sources					
Supplier's name or trade mark:	Scandinavian Lighti	ng Concept			
Supplier's address: The Light Gr	oup, Mjåvannsveier	n 175, 4628 Kristiansand	, NO		
Model identifier: SLC8545					
Type of light source:					
Lighting technology used:	LED	Non-directional or directional:	NDLS		
Light source cap-type	other				
(or other electric interface)					
Mains or non-mains:	MLS	Connected light source (CLS):	Yes		
Colour-tuneable light source:	Yes	Envelope:	-		
High luminance light source:	No				
Anti-glare shield:	No	Dimmable:	Yes		
	Product para	meters			
Parameter	Value	Parameter	Value		
General product parameters:					
Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer	30	Energy efficiency class	F		
Useful luminous flux (φuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	2 550 in Nar- row cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000 or 4 000		
On-mode power (P _{on}), expressed in W	30,0	Standby power (P _{sb}), expressed in W and rounded to the sec-	0,00		

ond decimal

tribution

Colour rendering in-

dex, rounded to the

nearest integer, or the range of CRI-val-

ues that can be set

Spectral power dis-

range 250 nm to 800

nm, at full-load

in


the

See imag	е		
in last pag	e		
	Page	1	/

95

parts and non- lighting con- trol parts, if any (millime- tre)					
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-		
		Chromaticity coordinates (x and y)	0,382 0,380		
Parameters for LED and OLED light sources:					
R9 colour rendering index value	80	Survival factor	1,00		
the lumen maintenance factor	0,96				
Parameters for LED and OLED mains light sources:					
displacement factor (cos φ1)	1,00	Colour consistency in McAdam ellipses	3		
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	_(b)	If yes then replace- ment claim (W)	-		
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0		

(a)'-': not applicable; (b)'-': not applicable;

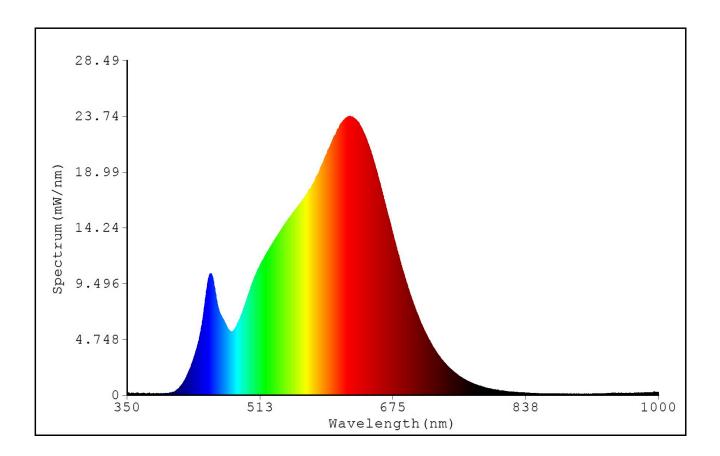

Model placed on the Union market from 01/12/2024



EPREL registration number: 2217160 https://eprel.ec.europa.eu/qr/22

17160

Supplier: THE LIGHT GROUP AS (Manufacturer) Website: www.tlg.no

Customer care service:

Name: The Light Group Website: www.tlg.no

Email: post@tlg.no Phone: +4738002101

Address:

Mjåvannsveien 175 4628 Kristiansand

Norway