

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: GLOBO Handels GmbH

Supplier's address: GLOBO Handels GmbH, Gewerbestraße 3, 9184 St. Peter, AT

Model identifier: 15743TL

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	2835 SMD		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	12	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 350 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	11,8	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,50
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	83
Outer dimensions without separate control gear, lighting control	Height	88	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	88	
	Depth	2	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,460 0,420
Parameters for LED and OLED light sources:			
R9 colour rendering index value	9	Survival factor	1,00
the lumen maintenance factor	0,97		

(a) : not applicable;

(b) : not applicable;

Lightsource Test Report

Product Information

Product Type: 15743ATL
Product Number: 裸测-2700K

Product Spec: 台灯


CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.4634$ $y=0.4174$ $u(u')=0.2617$ $v=0.3536$ $v'=0.5305$
 CCT: $T_c=2704K$ ($duv=0.00220$) Color Ratio: $R=0.252$ $G=0.727$ $B=0.021$
 Peak Wavelength: 608.3nm Half Bandwidth: 116.0nm
 Dominant Wavelength: 583.5nm Color Purity: 0.644
 Central Wave: 601.7nm Gravity Wave: 603.8nm
 CRI: $R_a=83.5$ TM30: $R_f=86$, $R_g=95$
 GAI: $GAI_{BB_8}=85.6$, $GAI_{BB_15}=92.6$, $GAI_{EES}=41.7$

R1 =82	R2 =91	R3 =97	R4 =83	R5 =83	R6 =92	R7 =82	R8 =59
R9 =9	R10=81	R11=84	R12=76	R13=84	R14=99	R15=73	TLCI=69

Color Quality Scale: $Q_a=84.0$, $Q_f=86.6$, $Q_p=83.9$, $Q_g=88.8$

Q1 =78	Q2 =93	Q3 =87	Q4 =85	Q5 =86	Q6 =86	Q7 =86	Q8 =89
Q9 =95	Q10=92	Q11=89	Q12=87	Q13=85	Q14=72	Q15=74	

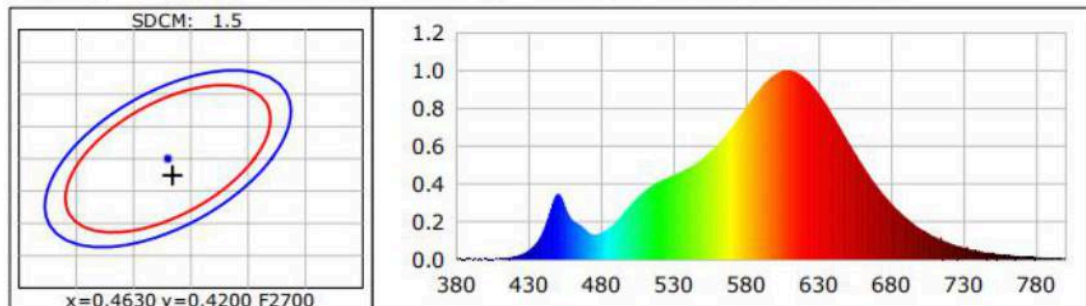

Photometric Parameters

Luminous Flux: 1240.2 lm Efficiency: 104.75 lm/W Radiant Power: 3.787 W
 Total mains efficacy: 104.75 lm/W Energy Efficiency Class: F (EU 2019/2015)
 Melanin Flux: 0.659 W M/R: 0.4418 MDER: 0.4020

Electric Parameters

Voltage: 230.20V Current: 0.0870A Power: 11.84W
 Power Factor: 0.5920 Frequency: 60.00Hz


Test Information

Scan Range: 380~800:1nm Photometric Method: sphere-spectroradiometer
 Stabilization Time: 0 Min ALC.: 1.0000 Photometric Condition: Sphere diameter: 1.50m, 4 π
 Max of Signal: 45475 (2940) CCD Integration Time: 162.27 ms

Condition: $T_x:32.6^\circ C$, $T_i:30.9^\circ C$, R.H.:60%
 Test Lab:
 Operator:

Test Device: CMS-2S (Plus)
 Test Time: 2024-07-29 18:50:01
 Inspector:

Model placed on the Union market from 13/11/2023



EPREL registration number: 2221430

<https://eprel.ec.europa.eu/qr/2221430>

Supplier: Globo Handels GmbH (Importer)

Website:

Customer care service:

Name: GLOBO Handels GmbH

Website:

Email: office@globo-lighting.com

Phone: +43425332050

Address:

Gewerbestraße 3
9184 St. Peter
Austria