

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: LOOM Design

Supplier's address: Main Office, Lilleringvej 30, 8462 Aarhus Harlev, DK

Model identifier: 874-001

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	40	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 630 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2700...2701
On-mode power (P_{on}), expressed in W	40,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,458 0,410	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	61	Survival factor	1,00	
the lumen maintenance factor	0,96			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	3	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) '-': not applicable;

(b) '-': not applicable;

Spectrum Test Report

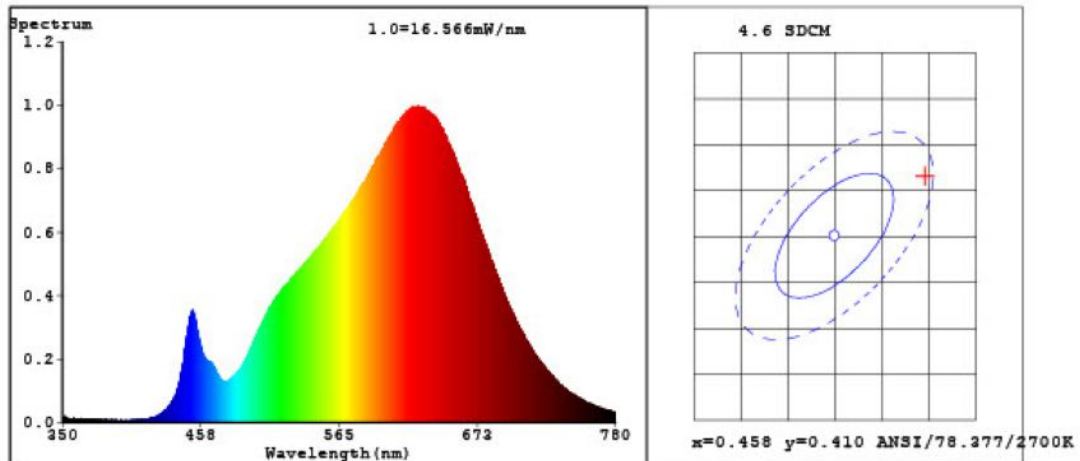

Color Parameters:

Chromaticity Coordinate: $x=0.4675$ $y=0.4166$ $u'=0.2647$ $v'=0.5308$

CCT=2643K(Duv=0.0016) Dominant WL:Ld =584.0nm Purity=65.4%

Ratio:R=26.6% G=71.3% B=2.0% Peak WL:Lp=626.9nm FWHM=147.6nm

Render Index:Ra=91.8

R1 =92 R2 =95 R3 =96 R4 =93 R5 =91 R6 =94 R7 =93

R8 =82 R9 =59 R10=87 R11=93 R12=80 R13=92 R14=97 R15=88

Photo Parameters:

Flux = 747.1 lm Eff. : 44.40 lm/W Φ_e = 2.656 W

Electrical parameters:


V = 219.87 V I = 0.1032 A P = 16.83 W PF = 0.7717

Status: Integral T = 437 ms I_p = 41306 (63%)

Model:SLV400S40DFA222A-1 上发光
Tester:彭金英
Temperature:25.3Deg
Manufacturer:SAT

Number:SLV400S40DFA222A-1 上发光
Date:2025-01-08 10:52:18
Humidity:51%
Remarks:

Model placed on the Union market from 03/03/2025



EPREL registration number: 2237539

<https://eprel.ec.europa.eu/qr/2237539>

Supplier: Lampefeber A/S (Importer)

Website: www.lampefeber.com

Customer care service:

Name: Main Office

Website: www.loom-design.com

Email: mail@lampefeber.com

Phone: +4586361722

Address:

Lilleringvej 30
8462 Harlev
Denmark