

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: LOOM Design

Supplier's address: Main Office, Lilleringvej 30, 8462 Aarhus Harlev, DK

Model identifier: 856-024

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter		Value	Parameter	Value
General product parameters:				
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer		95	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		6 170 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 796
On-mode power (P_{on}), expressed in W		95,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	94
Outer dimensions without separate control gear, light-	Height	4 160	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width	605		
	Depth	605		

ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,455 0,405	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	66	Survival factor	0,90	
the lumen maintenance factor	0,96			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,98	Colour consistency in McAdam ellipses	3	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,2	

(a) '-': not applicable;


(b) '-': not applicable;

LED Test Report

Product Mark

Product Type :MD23001023-24A
Temperature :25'C
Operator :
Remark:KL2025030404

Manufacturer :黑色 系数: 2.49221
Humidity :65%
Test Date :2025-03-04 15:28:48

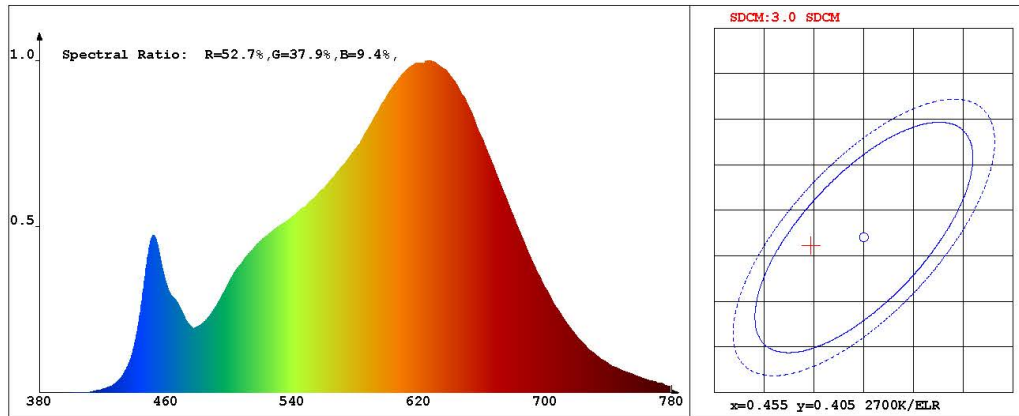

Chroma Parameters

Chro.Coord.:x=0.4497 y=0.4041 u=0.2588 v=0.3489 duv=-0.0015
CCT: 2796K Dominant Wave.:584.3nm Purity:56.3%
Flux RGB Ratio:R=25.2%,G=73.1%,B=1.7% Peak Wave:622.8nm Half Width:151.0nm

Rendering Index:Ra= 94.3

R1 =95 R2 =98 R3 =99 R4 =95 R5 =96 R6 =96 R7 =92 R8 =84
R9 =66 R10=95 R11=97 R12=84 R13=96 R14=99 R15=91
Fidelity Index (Rf)=91.6 Gamut Index (Rg)=100.0

Photo Parameters

Flux:6169.96lm Effi.:65.0lm/W Radiant:7457.4mW Iv:0.0mcd
Efficiency:0.210 Effi Level:A (EU 874-2012)


Ele. Parameters

Voltage:U=220.40V Current:I=0.4420A
Power:P=94.96W Power Factor:PF=0.972

Instrument state

Instrument:Hopoo HP8000S Integral Time: 48.048ms VPeak: 13657
VDark: 1279 Scan Range: 380-780nm Product ID: 201908704
Hopoo Optoelectronics Technology CO.,LTD www.hopoo.net

Model placed on the Union market from 10/03/2025



EPREL registration number: 2290131

<https://eprel.ec.europa.eu/qr/2290131>

Supplier: Lampefeber A/S (Importer)

Website: www.lampefeber.com

Customer care service:

Name: Main Office

Website: www.loom-design.com

Email: mail@lampefeber.com

Phone: +4586361722

Address:

Lilleringvej 30
8462 Harlev
Denmark